



Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time at ordering. Integral driver, thermally separated. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available, to be specified at time of ordering.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|------------------------------|
| Weight | 7.90 lb |
| Light distribution | symmetric, medium beam [M] |
| Light source | LED-12/24W / 700 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 12 |
| Rated input power | 27 W |

| | |
|--------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 310 |
| Total Lumen | 3720 |
| Tj | 85 |

| | |
|-----------------------|--------|
| Delivered lumens (lm) | |
| LED Lumen | 275.1 |
| Total Lumen | 3301.2 |
| Ta | 25 |

DAS120-PM LED PENDANT MOUNT

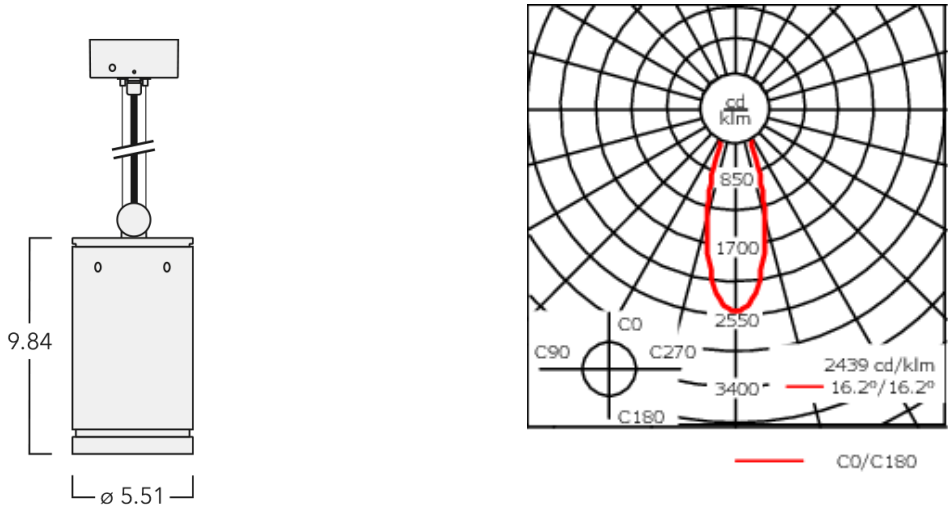

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, all aluminium construction |
| Lens | Safety glass lens |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
| Power factor | >0.9 |

134-2211



DAS120-PM LED PENDANT MOUNT

Additional information


| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | Contact WE-EF USA for ETL/UL certification status. |

DAS120-PM LED PENDANT MOUNT

Optical Accessories

Linear spread lens


| Description | Part ID | Additional information | C1 |
|-------------------|----------|---|------|
| IO-180-DAC120-LED | 134-2000 | Broadens light distribution in one plane only. Ideally suitable for [M][VN][VNS]. Does not fit in combination with [W] lens. A maximum of one internal optical accessory. Internal component, factory installed. | 4.05 |



DAS120-PM LED PENDANT MOUNT

Honeycomb louvre


| Description | Part ID | Additional information | C1 |
|---------------|----------|---|------|
| IW-DAC120-LED | 134-2002 | Honeycomb louvre, matt black Teflon® coated. For luminaires equipped with [W][M] light distribution. A maximum of one internal optical accessory. Internal component, factory installed. | 4.05 |



DAS120-PM LED PENDANT MOUNT

Wallwash lens

| Description | Part ID | C1 |
|---------------------|----------|------|
| IO-20-WW-DAC120-LED | 134-2001 | 3.62 |



DAS120-PM LED PENDANT MOUNT

Mounting Accessories

Adaptor for side conduit entry

| Description | Part ID | A | C1 |
|-----------------------------------|----------|------|------|
| DA12 Adaptor for DAC120/DAS120-PM | 134-2108 | 1.20 | 5.50 |

