

DAS140-PM LED PENDANT MOUNT



Description

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Cable suspension 1.5 - 5 ft., to be specified at time of ordering. Integral driver in thermally separated compartment. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|--|
| Weight | 5.50 lb |
| Light distribution | symmetric, very narrow beam, 'sharp cut-off' [VNS] |
| Light source | LED-24/48W / 700 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 24 |
| Rated input power | 55 W |

| | |
|---------------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 246 |
| Total Lumen | 5903 |
| Tj | 85 |

| | |
|------------------------------|-------|
| Delivered lumens (lm) | |
| LED Lumen | 219.6 |
| Total Lumen | 5270 |
| Ta | 25 |

Technical drawing of the 11.81 model, showing a side view. The drawing includes a height dimension of 11.81 and a base diameter dimension of $\varnothing 7.68$.

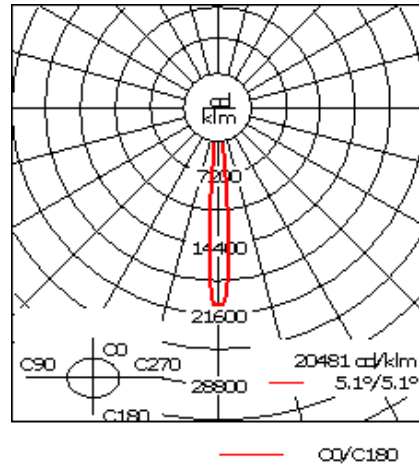

Material description

| | |
|----------------------|---|
| Body | Marine-grade, all aluminium construction |
| Lens | Safety glass lens |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

| | |
|------------------|---|
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
| Power factor | >0.9 |

DAS140-PM LED PENDANT MOUNT

Additional information


| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | Contact WE-EF USA for ETL/UL certification status. |

DAS140-PM LED PENDANT MOUNT

Optical Accessories

Linear spread lens


| Description | Part ID |
|-------------------|----------|
| IO-180-DAC140-LED | 134-2064 |



DAS140-PM LED PENDANT MOUNT


Wallwash lens

| Description | Part ID |
|---------------------|----------|
| IO-20-WW-DAC140-LED | 134-2065 |



Honeycomb louvre

| Description | Part ID |
|---------------|----------|
| IW-DA_140-LED | 134-2066 |



DAS140-PM LED PENDANT MOUNT

Mounting Accessories

Adaptor for side conduit entry

| Description | Part ID | A | C1 |
|-----------------------------------|----------|------|------|
| DA14 Adaptor for DAC140/DAS140-PM | 134-2109 | 1.20 | 7.70 |

