





Description

IP66, Class I. Class II on request. IK07. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. Tunable White Technology. The luminaire is factory-sealed and does not need to be opened during installation.

Other standardised housing lengths, 190 mm and 250 mm available on request.

Weight	5.50 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-24/42W / 325 mA - 2200-6000K
CRI	80
Power supply	EC
LEDs	24
Rated input power	51 W
Nominal Lumen (lm)	
LED Lumen	230
Total Lumen	5520
T _j	85
Rated lumens (lm)	
LED Lumen	166.4
Total Lumen	3993.5
T _a	25

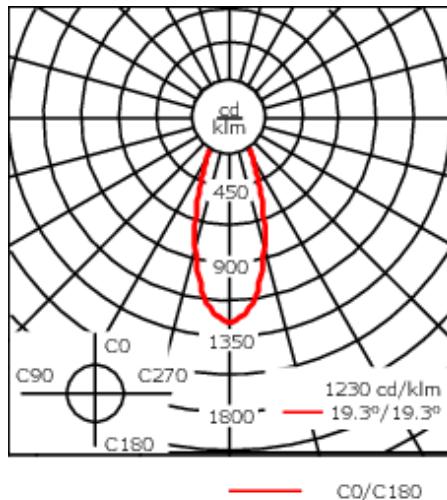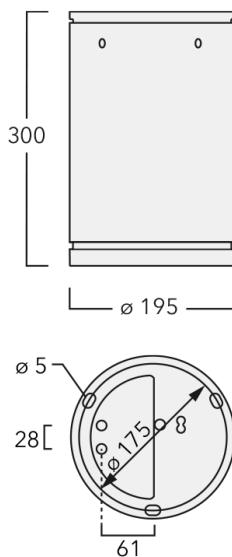

Specifications

Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Driver / Ballast


Additional information

Lifetime Ta=25° L90B10 > 90000h
Energy efficiency class D (Light source)

Optical Accessories

Linear spread lens


Description	Part ID
IO-180-DAC140-LED	134-2064



— C1 —

Wallwash lens


Description	Part ID
IO-20-WW-DAC140-LED	134-2065



— C1 —

Honeycomb louvre

Description	Part ID
IW-DA_140-LED	134-2066



— C1 —

Mounting Accessories

Adaptor for side conduit entry

Description	Part ID	A	C1
DA14 Adaptor for DAC140/DAS140-PM	134-2109	31	195

