

## DOC120 LED [New Construction]

**Description**

DOC120 LED for new construction. For remodel projects, see DOC120 LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Optional 2200 K version available, to be specified at time of ordering.

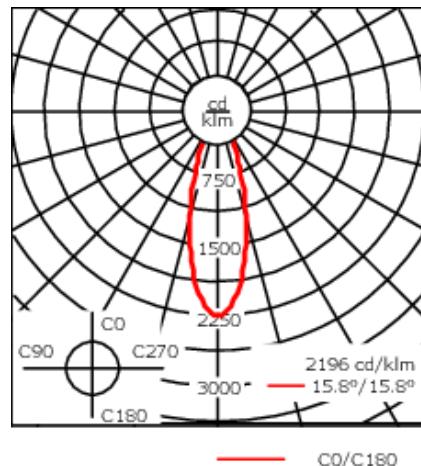
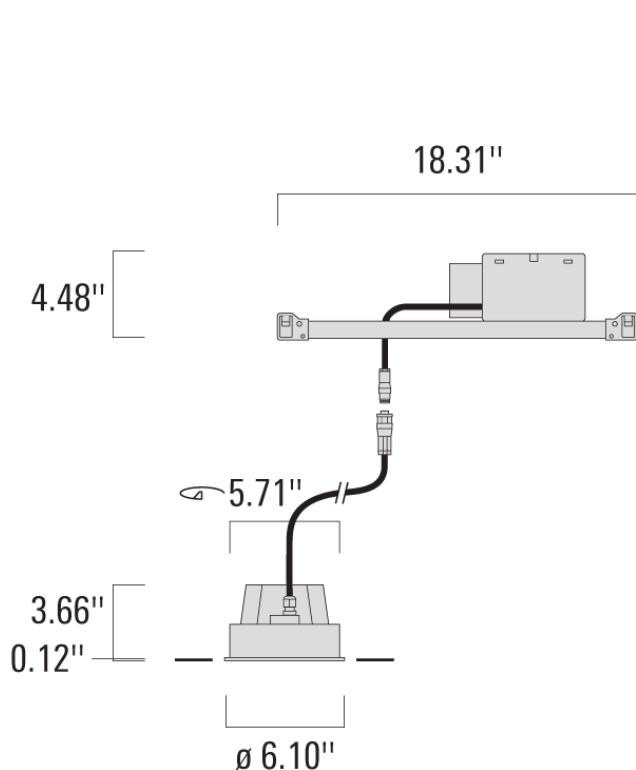
Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	5.07 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	28 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	245.9
Total Lumen	2951
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	211.9
Total Lumen	2542.8
T <sub>a</sub>	25

## DOC120 LED [New Construction]

**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #999; border-radius: 50%;"></span>  RAL9007 Grey Metallic         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #f0f0f0; border-radius: 50%;"></span>  RAL9016 White         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: darkgray; border-radius: 50%;"></span>  RAL8019 Dark Bronze         </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

## DOC120 LED [New Construction]

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

---

**Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
----------	----------------------------

---


Listings	Contact WE-EF USA for ETL/UL certification status.
----------	--

---

## Optical Accessories

### Wallwash lens


Description	Part ID	C1
IO-20-WW-DOC120-LED	134-1746	4.05



**DOC120 LED [New Construction]****Softening Lens**

---

Description	Part ID	C1
IO-360-DOC120-LED	134-1747	4.05

**Linear spread lens**

---

Description	Part ID	C1
IO-180-DOC120-LED	134-1745	4.05

