

Description

DOC140 LED for new construction. For remodel projects, see DOC140 LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Separate IP66 driver housing. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX - 9004 (Black)


+ XXX-XXXX (Accessory 1)

Weight	8.81 lb
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]
Light source	LED-24/48W / 700 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	24
Rated input power	55 W
Nominal Lumen (lm)	
LED Lumen	246
Total Lumen	5903
Tj	85
Delivered lumens (lm)	
Delivered lumens (lm) LED Lumen	227.7
	227.7 5464.3
LED Lumen	

we-ef

DOC140 LED [New Construction]

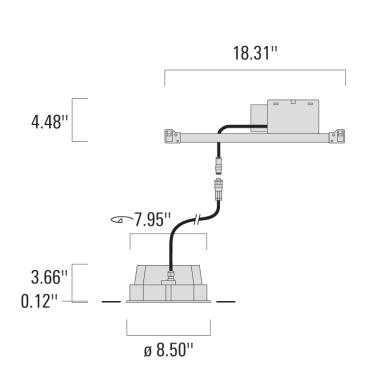

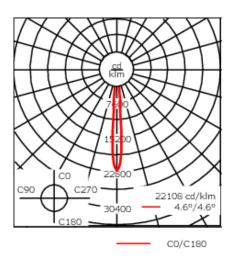

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
------	--

Lens Safety glass lens

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE



Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h	
Listings	Contact WE-EF USA for ETL/UL certification status.	



Optical Accessories

Linear spread lens

Description	Part ID	C1	
IO-180-DOC140-LED	134-1760	6.29	





Softening Lens

Description	Part ID	C1	
IO-360-DOC140-LED	134-1762	6.29	



Wallwash lens

