

DOC120-FT LED [New Construction]



Description

DOC120-FT LED for new construction. For remodel projects, see DOC120-FT LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. DMX interface. The luminaire is factory-sealed and does not need to be opened during the installation.

A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

A maximum of one internal optical accessory, to be specified at time of ordering.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	4.96 lb
Light distribution	symmetric, narrow beam [E]
Light source	LED-FT-24W (4000K)
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	27 W

Delivered lumens (lm)	
LED Lumen	1100.6
Total Lumen	1100.6
Ta	25

Nominal Lumen (lm)	
LED Lumen	4100
Total Lumen	4100
Tc	25

DOC120-FT LED [New Construction]

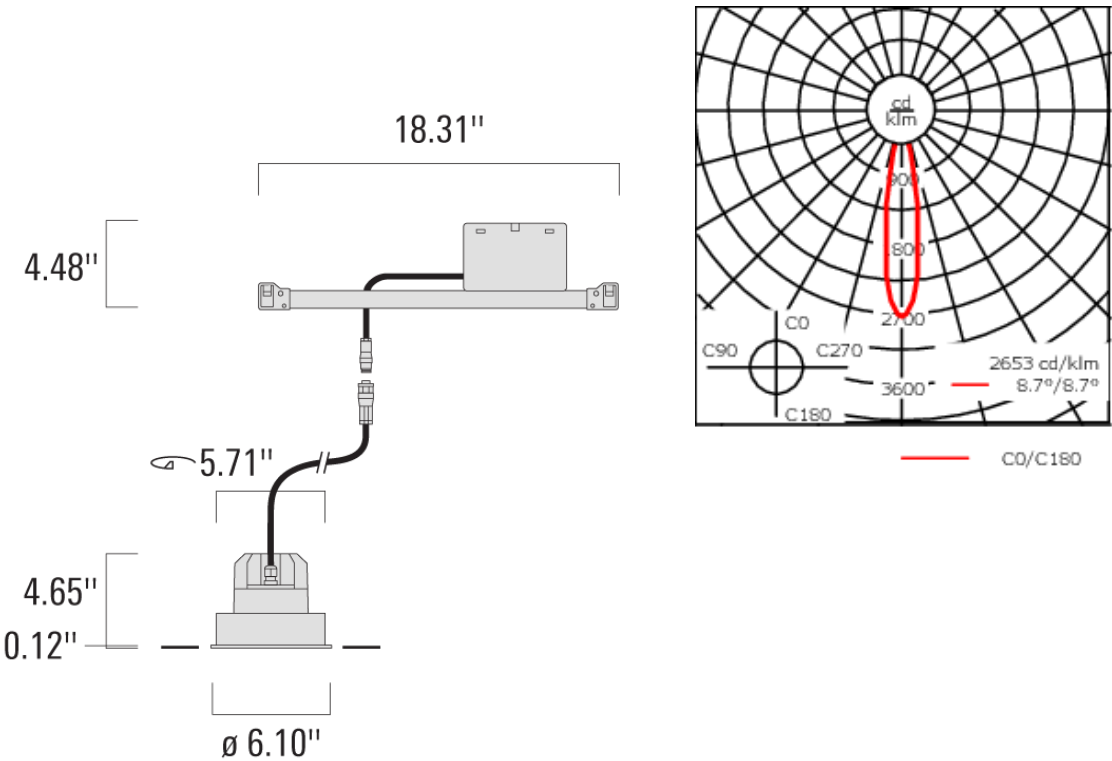

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

DOC120-FT LED [New Construction]

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9


Additional information

Lifetime	Ta=25°/40° L70B50 > 90000h
Listings	Contact WE-EF USA for ETL/UL certification status.

Optical Accessories

Linear spread lens


Description	Part ID	C1
IO-180-DOC120-LED-FT	134-1781	4.05



DOC120-FT LED [New Construction]

Softening Lens

Description	Part ID	C1
IO-360-DOC120-LED-FT	134-1782	4.05



Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC120-LED-FT	134-1771	4.05

