

Description

DOC120-FT LED for new construction. For remodel projects, see DOC120-FT LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. DMX interface. The luminaire is factory-sealed and does not need to be opened during the installation.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

A maximum of one internal optical accessory, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)


+ XXX-XXXX (Accessory 1)


Weight	4.96 lb
Light distribution	symmetric, narrow beam [E]
Light source	LED-FT-24W (4000K)
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	27 W
Delivered lumens (lm)	
LED Lumen	1100.6
Total Lumen	1100.6
Та	25
Nominal Lumen (lm)	
LED Lumen	4100
Total Lumen	4100
Tc	25

WE-EF LIGHTING USA, LLC

we-ef

DOC120-FT LED [New Construction]

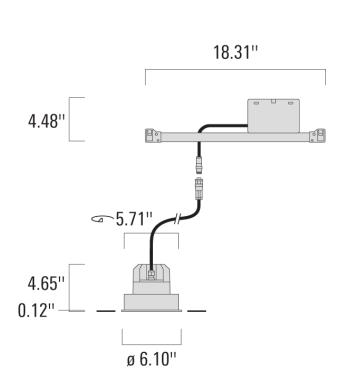

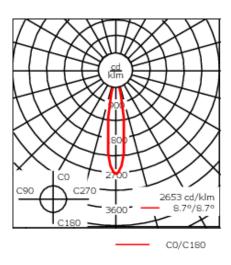

Specifications Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE



Electrical description

Power supply Integral	[ECG] electronic driver	120V-277V. 0-10V dimmab	le, to be specified with order.
-----------------------	-------------------------	-------------------------	---------------------------------

Driver / Ballast Integral EC electronic converter in thermally-separated compartment

Power factor > 0.9

Additional information

Listings Contact WE-EF USA for ETL/UL certification status.



Optical Accessories

Linear spread lens

Description	Part ID	C1
IO-180-DOC120-LED-FT	134-1781	4.05





Softening Lens

Description	Part ID	C1
IO-360-DOC120-LED-FT	134-1782	4.05



Wallwash lens

Description	C1
0-20-WW-DOC120-LED-FT	1 4.05

