

## DOC140-FT TW LED TUNABLE WHITE [New Construction]

**Description**

DOC140-FT TW LED for new construction. For remodel projects, see DOC140-FT TW LED [For Remodel] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral driver in thermally separated compartment. Darklight anodized aluminum reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White technology. DMX interface. The luminaire is factory-sealed and does not need to be opened during the installation.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

A maximum of one internal optical accessory, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Weight	6.17 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-FT-24W / 700mA - 2700-6000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	27 W

**Delivered lumens (lm)**

LED Lumen	1826.2
Total Lumen	1826.2
Ta	25

**Nominal Lumen (lm)**

LED Lumen	2702
Total Lumen	2702
Tc	25


**DOC140-FT TW LED TUNABLE WHITE [New Construction]**

---

Example: XXX-XXXX - 9004 (Black)

+ XXX-XXXX (Accessory 1)

## DOC140-FT TW LED TUNABLE WHITE [New Construction]

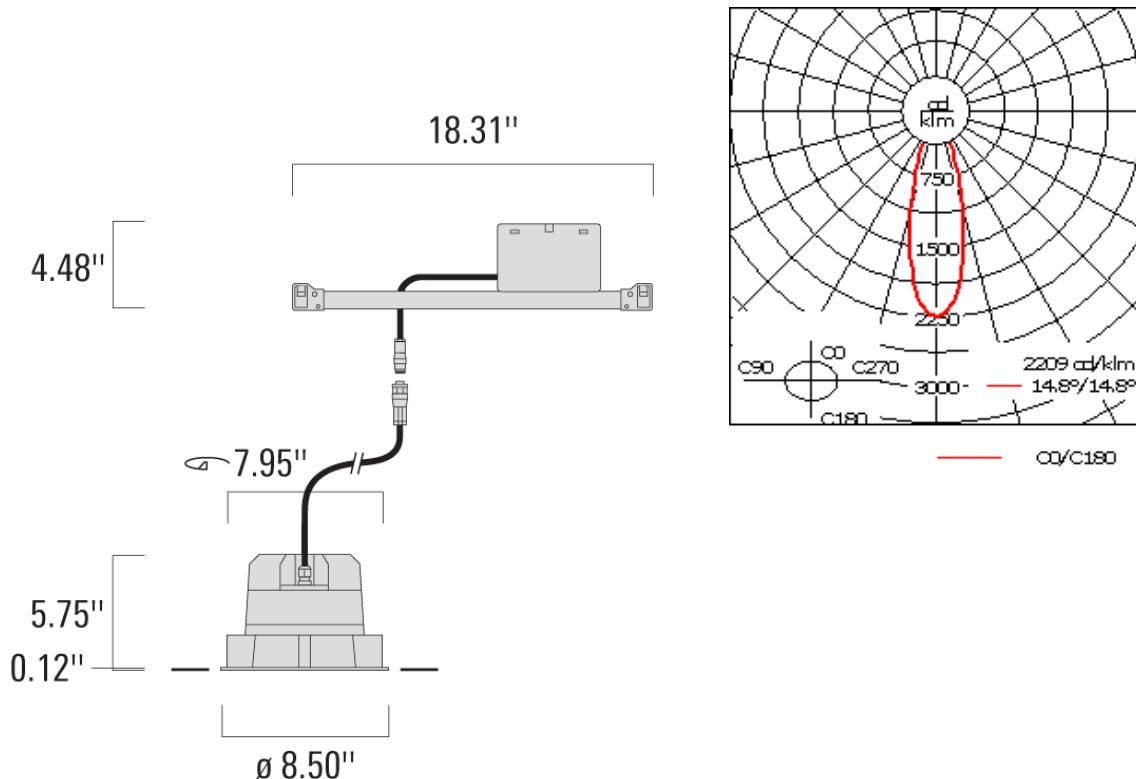**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: black; border: 1px solid black;"></span> </div> <div>RAL9004 Black</div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: #999; border: 1px solid black;"></span> </div> <div>RAL9007 Grey Metallic</div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: #e0e0e0; border: 1px solid black;"></span> </div> <div>RAL9016 White</div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: darkgray; border: 1px solid black;"></span> </div> <div>RAL8019 Dark Bronze</div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

**DOC140-FT TW LED TUNABLE WHITE [New Construction]****Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	DMX
Power factor	> 0.9

---

**Additional information**

---

Lifetime	Ta=25°/40° L70B50 > 90000h
Listings	ETL listed. Suitable for wet locations. IC rated (for insulated ceilings).


---

## DOC140-FT TW LED TUNABLE WHITE [New Construction]

**Optical Accessories****Linear spread lens**

---


Description	Part ID	C1
IO-180-DOC140-LED-FT	134-1816	6.73



## DOC140-FT TW LED TUNABLE WHITE [New Construction]


## Softening Lens

Description	Part ID	C1
IO-360-DOC140-LED-FT	134-1818	6.73



## Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC140-LED-FT	134-1817	6.73



## DOC140-FT TW LED TUNABLE WHITE [New Construction]

## Control

## DMX Booster Box

Description	Part ID
DMX Booster Box	400-0474



## DOC140-FT TW LED TUNABLE WHITE [New Construction]

## DMX Combination Cable

Description	Part ID
DMX Combination Cable	400-0480



## DMX Controller

Description	Part ID	Additional information
DMX Controller	400-0469	IP20. DIN Rail system. Is designed for either live or stand-alone control. It features one DMX universe, a USB connection, 128k flash memory for storing stand-alone programs.

## DOC140-FT LED TUNABLE WHITE [New Construction]

## DMX Controller (smart)


Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untuitive abd easy-to use keypad or one DMX universe. It can store up to 36 scences; alternatively, via ....



## DOC140-FT TW LED TUNABLE WHITE [New Construction]

## DMX Plug and Socket

Description	Part ID
DMX Plug and Socket	400-0479

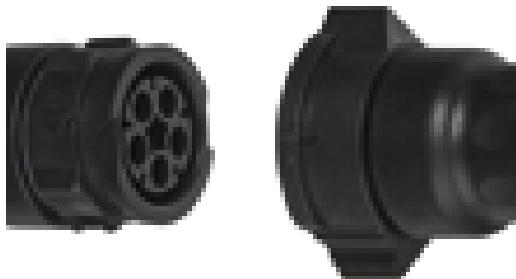

## DMX Termination Plug

Description	Part ID
DMX Termination Plug	400-0475

