



Description


IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Non-reflecting safety glass lens, hinged with safety switch. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Optional 2200 K version available. To be specified at time of ordering.

Includes cable connector, for cable 6-12 mm. Cable inclination angle: Maximum 10°.

|                    |                                   |
|--------------------|-----------------------------------|
| Weight             | 14.70 kg                          |
| Light distribution | asymmetric, side throw beam [S70] |
| Light source       | LED-36/18W/18W / 350 mA - 3000 K  |
| CRI                | 70                                |
| Power supply       | EC                                |
| LEDs               | 36                                |
| Rated input power  | 38 W                              |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 180  |
| Total Lumen        | 6480 |
| Tj                 | 85   |

|                   |        |
|-------------------|--------|
| Rated lumens (lm) |        |
| LED Lumen         | 156.4  |
| Total Lumen       | 5630.6 |
| Ta                | 25     |

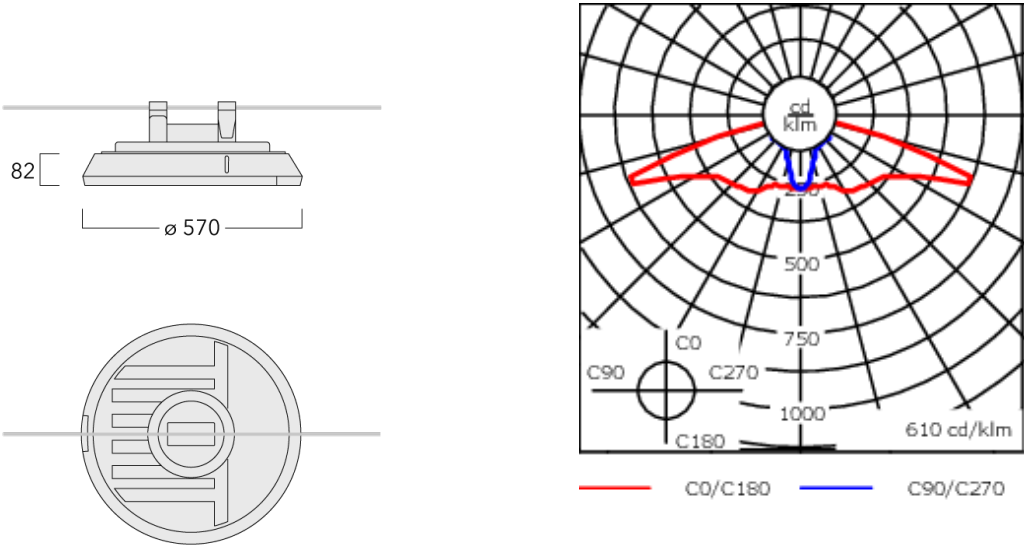

Specifications

Material description

|                      |                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                                                               |
| Lens                 | Non-reflecting safety glass lens, hinged                                                                                                                                                                                             |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                                                                                                                          |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware                                                                                                                                                                                          |
| Ingress protection   | IP66                                                                                                                                                                                                                                 |
| Impact resistance    | IK07                                                                                                                                                                                                                                 |
| Corrosion resistance | 5CE                                                                                                                                                                                                                                  |
| Windage              | 0.074 m <sup>2</sup>                                                                                                                                                                                                                 |

Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 220-240V / 50-60 Hz              |
| Driver / Ballast | Integral EC electronic converter |
| Power factor     | > 0.9                            |
| Surge protection | 6/6 kV (optional SP10)           |

**Additional information**

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source)     |

Control

Eco Step Dim® Basic

| Description             | Part ID  |
|-------------------------|----------|
| Eco Step Dim® Basic LED | 430-0001 |

Eco Step Dim® Advanced

| Description                | Part ID  |
|----------------------------|----------|
| Eco Step Dim® Advanced LED | 430-0002 |

R2C Ready to Connect

| Description                | Part ID  |
|----------------------------|----------|
| R2C Ready to Connect (top) | 430-0019 |