




Description

IP66, Class I. Class II on request. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Optional 2200 K version available. To be specified at time of ordering.

Includes cable connector, for cable 9-14 mm. +/- 14° adjustable to compensate for sloping catenary systems.

|                    |                              |
|--------------------|------------------------------|
| Weight             | 13.30 kg                     |
| Light distribution | rectangular [R]              |
| Light source       | LED-36/36W / 350 mA - 3000 K |
| CRI                | 70                           |
| Power supply       | EC                           |
| LEDs               | 36                           |
| Rated input power  | 39 W                         |
| Nominal Lumen (lm) |                              |
| LED Lumen          | 180                          |
| Total Lumen        | 6480                         |
| Tj                 | 85                           |
| Rated lumens (lm)  |                              |
| LED Lumen          | 168.1                        |
| Total Lumen        | 6052.7                       |
| Ta                 | 25                           |

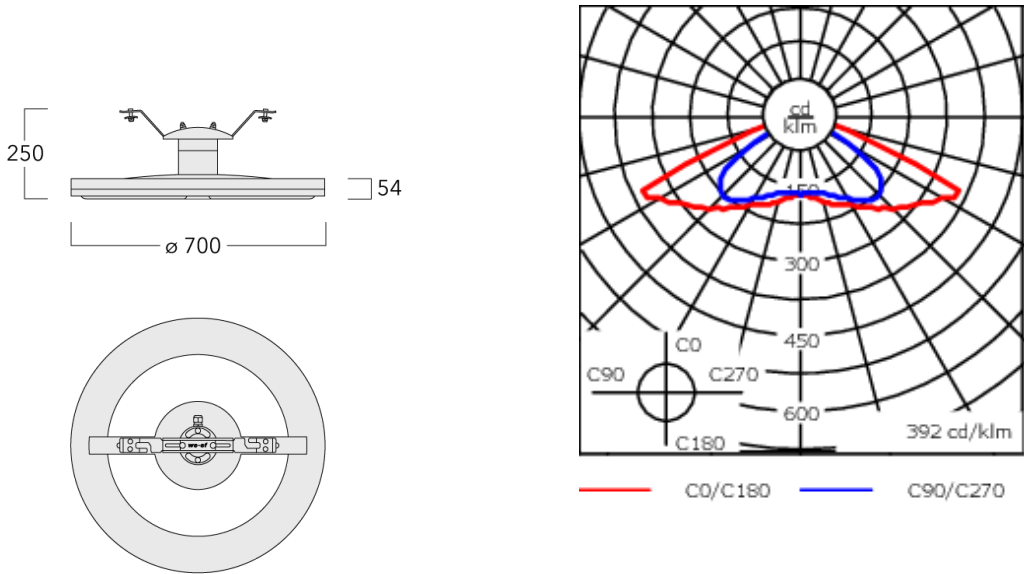

Specifications

Material description

|                      |                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                                                               |
| Lens                 | PMMA RFC® Reflection Free Contour technology                                                                                                                                                                                         |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                                                                                                                          |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware                                                                                                                                                                                          |
| Ingress protection   | IP66                                                                                                                                                                                                                                 |
| Impact resistance    | IK08                                                                                                                                                                                                                                 |
| Corrosion resistance | 5CE                                                                                                                                                                                                                                  |
| Windage              | 0.13 m²                                                                                                                                                                                                                              |

Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 220-240V / 50-60 Hz              |
| Driver / Ballast | Integral EC electronic converter |
| Power factor     | < 0.9                            |
| Surge protection | 6/6 kV (optional SP10)           |

**Additional information**

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source)     |