



Description

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. ASC Anti Slip ceramic Coating on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gelimpregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver. Advanced thermal management protects LEDs while optimizing lumens output. LED module can be easily removed for upgrading.

The concrete-pour installation blockout is supplied as standard with luminaire.

Weight	22.00 lb
Light distribution	symmetric, very narrow beam [VN]
Light source	LED-12/24W / 700 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	28 W
Nominal Lumen (lm)	
LED Lumen	233
Total Lumen	2796
Tj	85
Delivered lumens (lm)	
LED Lumen	190.8
Total Lumen	2289.9
Та	25

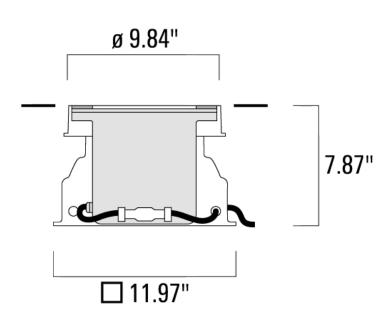



ETC330-FS LED

Specifications Material description

Body Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.

Lens Safety glass lens, max. load 5 tonnes

Colors Stainless Steel

Fasteners PCS polymer coated stainless steel

Ingress protection IP69K - HIGHEST PROTECTION RATING AVAILABLE

Impact resistance IK10+
Corrosion resistance 5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Tormination	Factory social termination chamber

Additional information

Lifetime	LFD >60.000 h Ta 25°C (L70/B10) Control	gear > 50.000 h Ta 25°C

Dimming 0-10V available in request. Must be factory fitted.

Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Optical Accessories

Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7170	7.52



ETC330-FS LED


Softening Lens

Description	Part ID	C1
Flood lens IO-360	185-7171	6.30



Linear louvre


Description	Part ID (C1
Linear louvre IL	185-717	7.52



ETC330-FS LED

Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	7.53



Wallwash lens

Description	Part ID C1
IO-20-WW-ETC/EVC_30-FS-L	134-1492 7.52

