





Description

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

|                    |  |
|--------------------|--|
| Weight             | 0.85 kg  |
| Light distribution | symmetric Zoom-Projector [ZP] - min aperture angle |
| Light source       | LED-1/6W / 500 mA - 4000 K                         |
| CRI                | 80   |
| Power supply       | EC   |
| LEDs               | 1  |
| Rated input power  | 7.5 W  |
| Rated lumens (lm)  |  |
| LED Lumen          | 424  |
| Total Lumen        | 424  |
| Ta                 | 25   |
| Nominal Lumen (lm) |  |
| LED Lumen          | 720  |
| Total Lumen        | 720  |
| Tc                 | 25   |

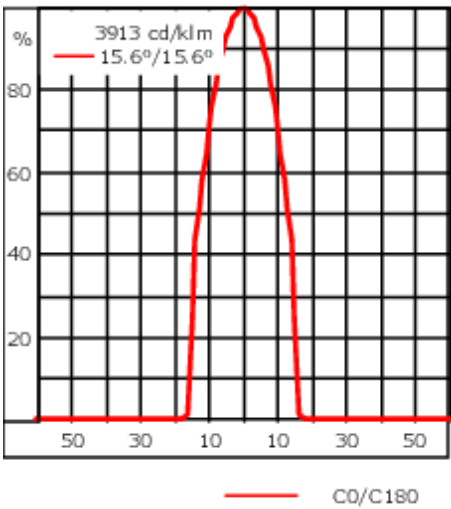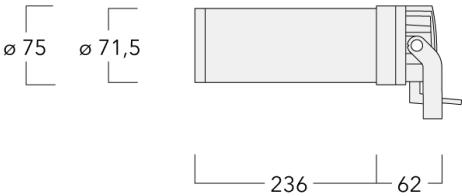

Specifications  
Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Lens                 | Safety glass lens  |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket  |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware  |
| Ingress protection   | IP66   |
| Impact resistance    | IK07   |
| Corrosion resistance | 5CE+Primer   |
| Windage              | 0.11 ft²   |

Electrical description

|                  |       |
|------------------|-------|
| Driver / Ballast | DALI  |
| Power factor     | > 0.9 |

Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=40° L90B10 > 90000h |
|----------|------------------------|

Mounting Accessories

Junction box

| Description            | Part ID  | A  | B  | C1  | C2 |
|------------------------|----------|----|----|-----|----|
| JB200 R82 Junction box | 139-2590 | 55 | 82 | 140 | 80 |

