

Description

Profile Projector [GP] for projection of gobos on a surface. -Spherical and aspherical, double flat convex lens system.


IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG[®] Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 3.0 m. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

Gobo outside diameter 37.5 mm, max. printable area d = 28 mm

| Weight | 1.87 lb |
|-----------------------|---------------------------------|
| Light distribution | symmetric Gobo-Projector [GP] - |
| | min aperture angle |
| Light source | LED-1/6W / 500 mA - 2700 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 7.5 W |
| Delivered lumens (lm) | |
| LED Lumen | 286.9 |
| Total Lumen | 286.9 |
| Та | 25 |
| Nominal Lumen (lm) | |
| LED Lumen | 670 |
| Total Lumen | 670 |
| Тс | 25 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/14/2025

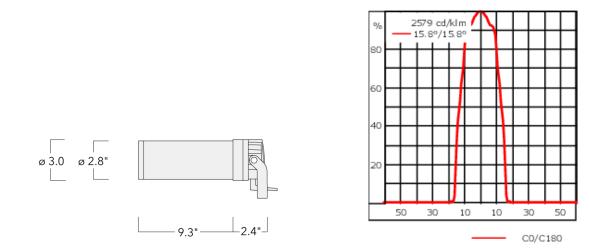

Specifications Material description

| Body | Marine-grade, die-cast aluminium alloy |
|----------------------|---|
| Lens | Safety glass lens |
| Colors | RAL9004 Black |
| | RAL9007 Grey Metallic |
| | RAL9016 White |
| | RAL8019 Dark Bronze |
| Gasket | Silicone CCG [®] Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |
| Windage | 0.11 ft ² |

Electrical description

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/14/2025

139-2749_min

FLC201 LED GOBO PROJECTOR

we-ef

Additional information

Lifetime

Ta=25°/40° L90B10 > 90000h

Mounting Accessories


Ground spike EF

| Description | Part ID | H1 | Weight (lb) |
|----------------------|----------|-------|-------------|
| EF1-M18 Ground spike | 310-0045 | 10.70 | 0.80 |
| | | H1 | |

WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/14/2025

Junction box

| Description | Part ID | А | В | C1 | C2 |
|------------------------|----------|------|------|------|------|
| JB200 R82 Junction box | 139-2590 | 2.17 | 3.23 | 5.51 | 3.15 |



WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/14/2025

Optical Accessories

Gobo cartridge

| Description | Part ID |
|--------------------------------|----------|
| Gobo cartridge for FLC201 [GP] | 139-2859 |

WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/14/2025



Electrical Accessories

Gear box

| Description | Part ID | А | В | C1 | C2 |
|-----------------------|----------|---|-----|----|-----|
| LC201 Remote Gear Box | 139-6977 | 3 | 4.7 | 9 | 7.9 |

