

FLC201 LED GOBO PROJECTOR

**Description**

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system.

IP66, Class III, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 3.0 m. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

Gobo outside diameter 37.5 mm, max. printable area d = 28 mm

Weight	1.87 lb
Light distribution	symmetric Gobo-Projector [GP] - min aperture angle
Light source	LED-1/6W / 500 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	7.5 W



Delivered lumens (lm)

LED Lumen	286.9
Total Lumen	286.9
Ta	25

Nominal Lumen (lm)

LED Lumen	670
Total Lumen	670
Tc	25

FLC201 LED GOBO PROJECTOR

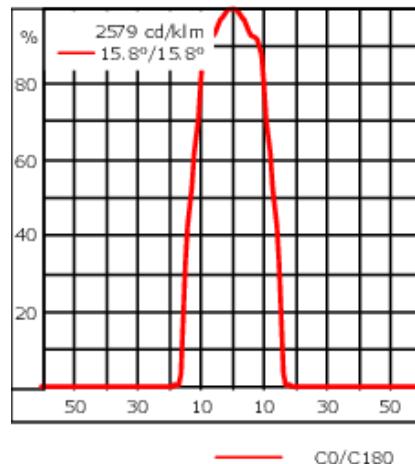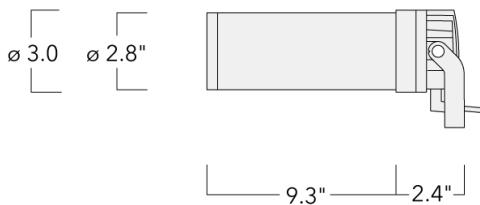**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 20px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 20px; height: 15px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 20px; height: 15px; background-color: #F0F0F0; margin-right: 10px;"></div> RAL9016 White <div style="display: inline-block; width: 20px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.11 ft ²

Electrical description

Driver / Ballast	DALI
Power factor	> 0.9

FLC201 LED GOBO PROJECTOR**Additional information**


Lifetime	Ta=25°/40° L90B10 > 90000h
----------	----------------------------

FLC201 LED GOBO PROJECTOR

Mounting Accessories

Ground spike EF


Description	Part ID	H1	Weight (lb)
EF1-M18 Ground spike	310-0045	10.70	0.80



FLC201 LED GOBO PROJECTOR

Junction box

Description	Part ID	A	B	C1	C2
JB200 R82 Junction box	139-2590	2.17	3.23	5.51	3.15

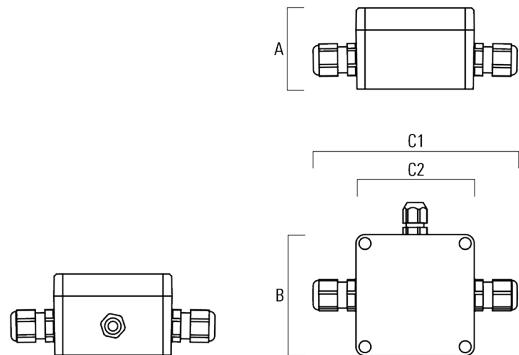

FLC201 LED GOBO PROJECTOR**Optical Accessories****Gobo cartridge**

Description	Part ID
Gobo cartridge for FLC201 [GP]	139-2859

FLC201 LED GOBO PROJECTOR

Electrical Accessories

Gear box

Description	Part ID	A	B	C1	C2
FLC201 Remote Gear Box	139-6977	3	4.7	9	7.9

