

FLC201 LED GOBO PROJECTOR

**Description**

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system.

IP66, Class III, IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 3.0 m. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

Gobo outside diameter 37.5 mm, max. printable area d = 28 mm

Weight	1.87 lb
Light distribution	symmetric Gobo-Projector [GP] - max aperture angle
Light source	LED-1/6W / 500 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	7.5 W



Delivered lumens (lm)

LED Lumen	167
Total Lumen	167
Ta	25

Nominal Lumen (lm)

LED Lumen	670
Total Lumen	670
Tc	25

FLC201 LED GOBO PROJECTOR

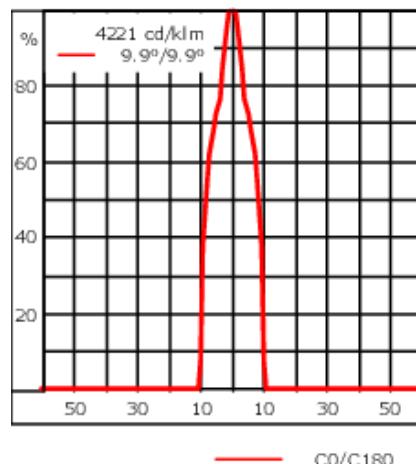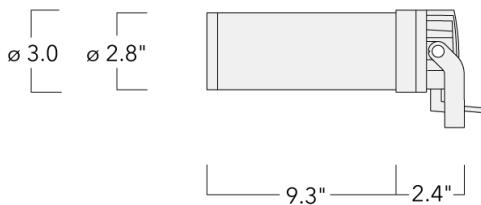

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 15px; height: 15px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 15px; height: 15px; background-color: #F0F0F0; margin-right: 10px;"></div> RAL9016 White <div style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.11 ft ²

Electrical description

Driver / Ballast	DALI
Power factor	> 0.9

FLC201 LED GOBO PROJECTOR**Additional information**


Lifetime	Ta=25°/40° L90B10 > 90000h
----------	----------------------------

FLC201 LED GOBO PROJECTOR

Mounting Accessories

Ground spike EF


Description	Part ID	H1	Weight (lb)
EF1-M18 Ground spike	310-0045	10.70	0.80

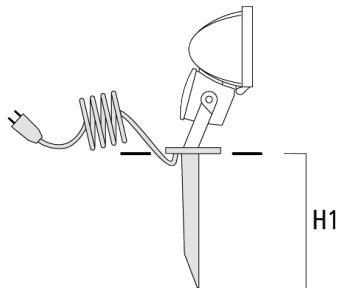

FLC201 LED GOBO PROJECTOR

Junction box

Description	Part ID	A	B	C1	C2
JB200 R82 Junction box	139-2590	2.17	3.23	5.51	3.15

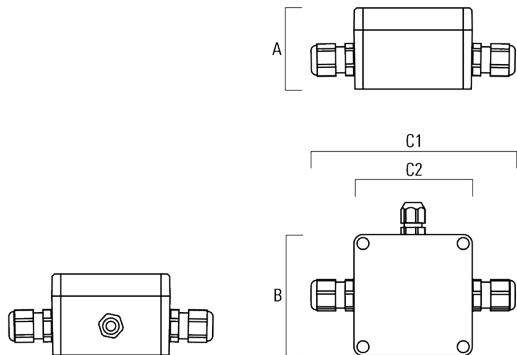

FLC201 LED GOBO PROJECTOR**Optical Accessories****Gobo cartridge**

Description	Part ID
Gobo cartridge for FLC201 [GP]	139-2859

FLC201 LED GOBO PROJECTOR

Electrical Accessories

Gear box

Description	Part ID	A	B	C1	C2
FLC201 Remote Gear Box	139-6977	3	4.7	9	7.9

