FLC201 LED FRAMING PROJECTOR



Description

Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.


IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. One factory installed flange plug M8 x 1.5. Cable length 10 ft. CAD-optimised optics for superior illumination and glare control. Factory-installed LED circuit board.

Weight	1.87 lb
Light distribution	symmetric Framing-Projector [FP]
	- min aperture angle
Light source	LED-1/6W / 500 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	7.5 W
Delivered lumens (lm)	
LED Lumen	394.6
Total Lumen	394.6
Та	25
Nominal Lumen (lm)	
LED Lumen	670
Total Lumen	670
Тс	25

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/16/2025

FLC201 LED FRAMING PROJECTOR

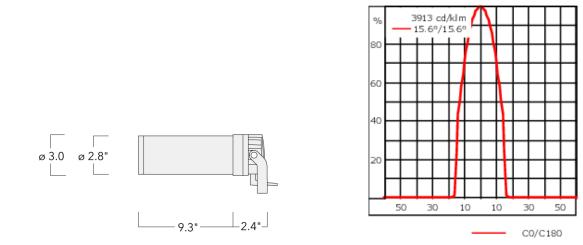

Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	RAL9004 Black
	RAL9007 Grey Metallic
	RAL9016 White
	RAL8019 Dark Bronze
Gasket	Silicone CCG [®] Controlled Compression Gasket
Fasteners	Eingebauter Flanschstecker M8 x 1,5. Anschlussleitung 3 m
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.11 ft ²

Electrical description

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/16/2025



FLC201 LED FRAMING PROJECTOR

we-ef

Additional information

Lifetime

Ta=25°/40° L90B10 > 90000h

FLC201 LED FRAMING PROJECTOR

we-ef

Mounting Accessories

Ground spike EF

Description	Part ID	H1	Weight (lb)
EF1-M18 Ground spike	310-0045	10.70	0.80
× MMb			
		11	


WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/16/2025

FLC201 LED FRAMING PROJECTOR

we-ef

Junction box

Description	Part ID	А	В	C1	C2
JB200 R82 Junction box	139-2590	2.17	3.23	5.51	3.15



WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/16/2025

FLC201 LED FRAMING PROJECTOR

we-ef

Electrical Accessories

Gear box

Description	Part ID	A E		C1	C2
LC201 Remote Gear Box	139-6977	3 4	1.7	9	7.9

