

ETC320-FS LED



Description

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.



Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout and sealable junction box included in supply.

Weight	3.50 kg
Light distribution	flood, narrow beam, sharp cut-off [EES]
Light source	LED-6/12W / 700 mA - 2700 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	15 W

Nominal Lumen (lm)	
LED Lumen	233
Total Lumen	1398
Tj	85
Rated lumens (lm)	
LED Lumen	202.2
Total Lumen	1213.5
Ta	25

ETC320-FS LED

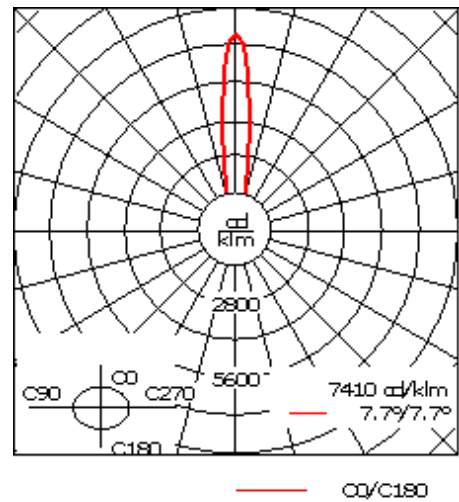

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

Warranty	
----------	--

Control**DALI interface**

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

Mounting Accessories

Installation cover


Description	Part ID	C1
Installation cover BE	185-0796	160



Optical Accessories


Colour filter

Description	Part ID
Colour filter IF	on request



Flood lens

Description	Part ID	C1
Flood lens IO-360	146-0419	96



ETC320-FS LED


Linear louver

Description	Part ID	C1
Linear louver IL	185-7133	110



Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	146-0418	110



ETC320-FS LED


Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	185-7029	110



Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	146-0625	110



ETC320-FS LED

Colour correction filter

Description	Part ID
IF-3000K > 2400K	146-9054

