

## ETC330-FS LED

**Description**

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control.

Luminaire requires installation blackout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

Weight	6.40 kg
Light distribution	linear spread, very narrow beam, sharp cut-off [EES]
Light source	LED-12/24W / 700 mA - 2700 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	28 W


**Nominal Lumen (lm)**

LED Lumen	233
Total Lumen	2796
Tj	85

**Rated lumens (lm)**

LED Lumen	186.2
Total Lumen	2234
Ta	25

## ETC330-FS LED

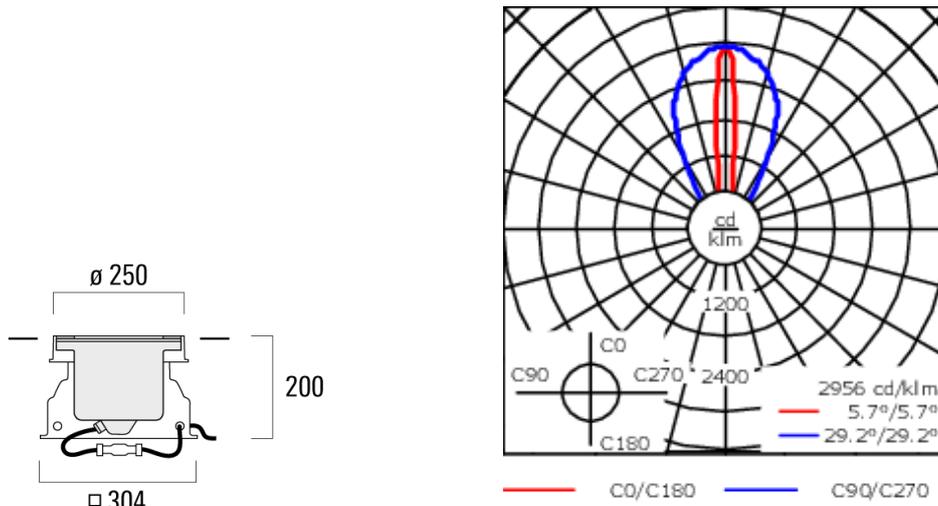

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Termination	Junction box supplied

### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--

#### WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499


info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 12/03/2026

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250




C1

---

## Optical Accessories


### Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



### Surface wash lens

Description	Part ID	C1
Flood lens IO-360	185-7171	191




**ETC330-FS LED**

---

**Colour filter**

Description	Part ID
Colour filter IF	on request



---

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-ETC/EVC_30-FS-LED	185-8492	191

