



### Description


Tunable white inground. IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC\_R\_ One LED Concept. LED circuit board with Tunable White Technology. DALI Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

Weight	6.40 kg
Light distribution	symmetric, wallgrazer [A6]
Light source	LED-12/19W - 2200-6000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	34 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	210
Total Lumen	2520
Tj	85
<b>Rated lumens (lm)</b>	
LED Lumen	141.8
Total Lumen	1702.1
Ta	25

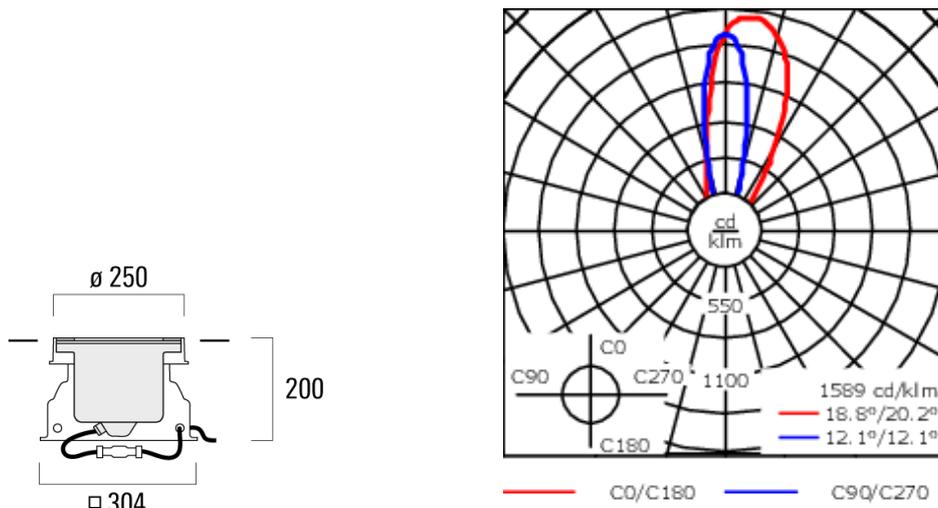

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

### Electrical description

Driver / Ballast	Integral EC electronic converter with DALI Interface
------------------	--

### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--

## Mounting Accessories

### Installation cover


Description	Part ID	C1
Installation cover BE	185-0325	250



## Optical Accessories


### Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



### Surface wash lens

Description	Part ID	C1
Flood lens IO-360	185-7171	191




**ETC330-FS TW LED**

---

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-ETC/EVC_30-FS-LED	185-8492	191



C1