



Description


Tunable white inground. IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept. LED circuit board with Tunable White Technology. DALI Interface . For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch **here.**

Weight	11.00 kg
Light distribution	symmetric, wallgrazer [A6]
Light source	LED-24/30W / 225 mA - 2200-6000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	34 W
Nominal Lumen (lm)	
LED Lumen	170
Total Lumen	4080
T _j	85
Rated lumens (lm)	
LED Lumen	112.5
Total Lumen	2699.8
T _a	25

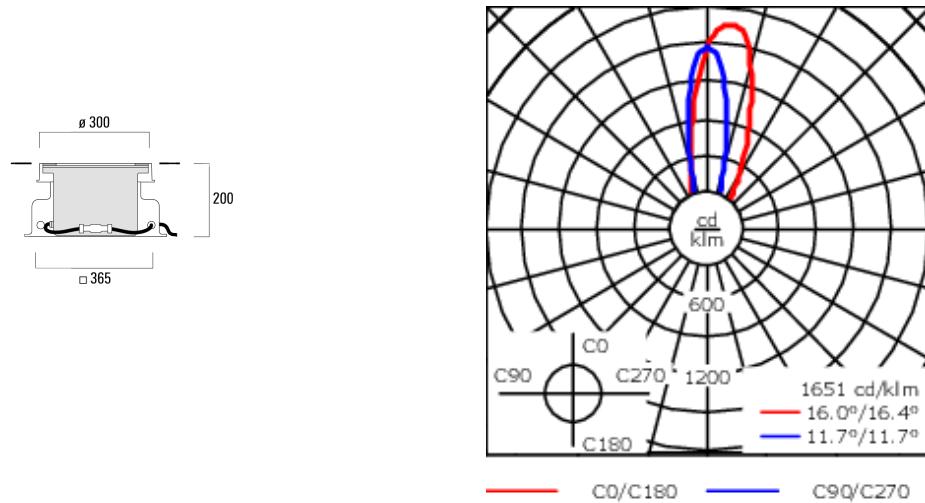

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

Electrical description

Driver / Ballast Integral EC electronic converter with DALI Interface


Additional information

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300



C1

Optical Accessories

Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-7579	220



C1

Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7580	220



C1

Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	185-7589	220

