





Description

IP66, Class I. IK07. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. Two cable entries. Ceiling mount through canopy. Pendulum rod 0.5 - 1.5 m can be selected in 0.1 m increments. To be specified at time of ordering. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Other standardised housing lengths available on request.

Optional 2200 K version available. To be specified at time of ordering.

Weight	5.50 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-24/48W / 700 mA - 2700 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	54 W
Nominal Lumen (lm)	
LED Lumen	270
Total Lumen	6480
T _j	85
Rated lumens (lm)	
LED Lumen	204.8
Total Lumen	4916.1
T _a	25

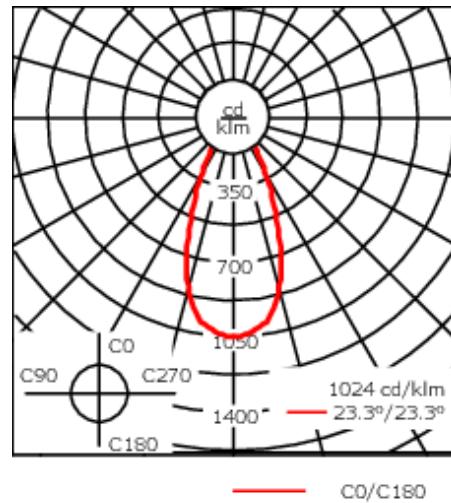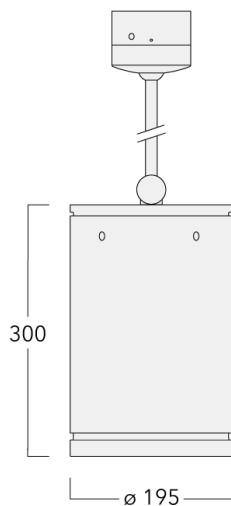

Specifications

Material description

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colours	<div style="display: inline-block; width: 100px; height: 15px; background-color: black;"></div> RAL9004 Signal black <div style="display: inline-block; width: 100px; height: 15px; background-color: #a9a9a9;"></div> RAL9007 Grey aluminium <div style="display: inline-block; width: 100px; height: 15px; background-color: #333333;"></div> RAL7016 Anthracite grey <div style="display: inline-block; width: 100px; height: 15px; background-color: #f0f0f0;"></div> RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	>0.9


Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Optical Accessories

Linear spread lens


Description	Part ID
Linear spread lens IO-180	134-2064



— C1 —

Wallwash lens


Description	Part ID
Wallwash lens IO-20	134-2065



— C1 —

Honeycomb louvre

Description	Part ID
Honeycomb louvre IW	134-2066



— C1 —