



Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Including 1.5 m of flexible PVC free cable. Knuckle permits 340° rotation, forward tilt 73° and backward tilt 90°.

Mains voltage versions, ON-OFF Class I. 1-10 V analogue dimming or DALI interface available on request; refer to accessory listings.



Optical accessories are factory-installed. To be specified at time of ordering.

|                    |                            |
|--------------------|----------------------------|
| Weight             | 1.60 kg                    |
| Light distribution | symmetric, medium beam [M] |
| Light source       | LED-3/6W / 180 mA - 4000 K |
| CRI                | 80                         |
| Power supply       | EC                         |
| LEDs               | 3                          |
| Rated input power  | 7.5 W                      |

| Nominal Lumen (lm) |     |
|--------------------|-----|
| LED Lumen          | 280 |
| Total Lumen        | 840 |
| Tj                 | 85  |

| Rated lumens (lm) |       |
|-------------------|-------|
| LED Lumen         | 215.5 |
| Total Lumen       | 646.6 |
| Ta                | 25    |

FLC311 Spigot mounted

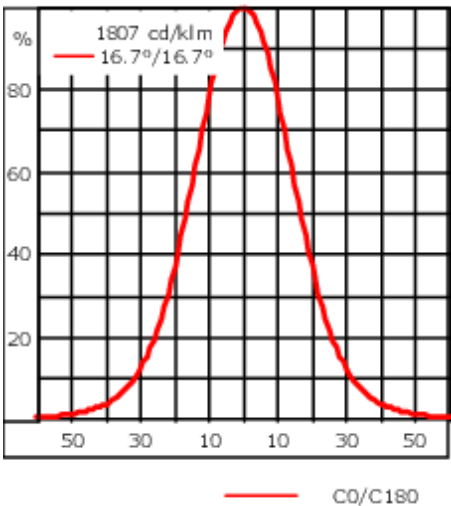

Specifications

Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Lens                 | Safety glass lens  |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket  |
| Fasteners            | PCS hardware   |
| Ingress protection   | IP66   |
| Impact resistance    | IK08   |
| Corrosion resistance | 5CE  |
| Windage              | 0.020 m <sup>2</sup>   |

Electrical description

|                  |      |
|------------------|------|
| Driver / Ballast | DALI |
| Power factor     | >0.9 |


Additional information

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L90B10 > 90000h |
| Energy efficiency class | D-E (Light source)     |


Mounting Accessories

Flat surface and Column fitter

| Description          | Part ID  | A  | B | Weight (kg) |
|----------------------|----------|----|---|-------------|
| Column fitter FLC300 | 145-9536 | 70 |   | 0.20        |

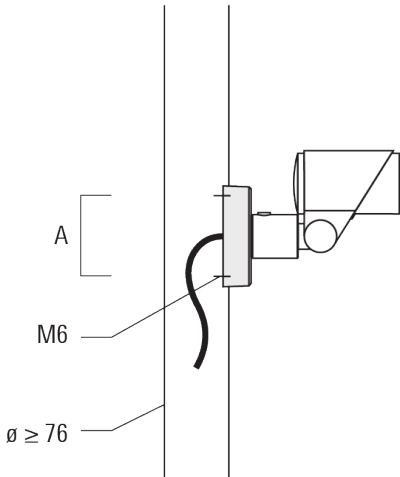


|                            |          |     |    |      |
|----------------------------|----------|-----|----|------|
| Flat surface fitter FLC300 | 145-9535 | 100 | 85 | 0.20 |
|----------------------------|----------|-----|----|------|

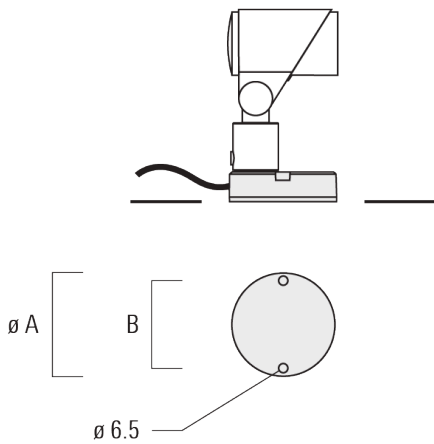

FLC311 Spigot mounted


Ground spike EF

| Description                 | Part ID  | A   | Weight (kg) |
|-----------------------------|----------|-----|-------------|
| Ground spike EF1 for FLC300 | 310-9102 | 270 | 1.20        |

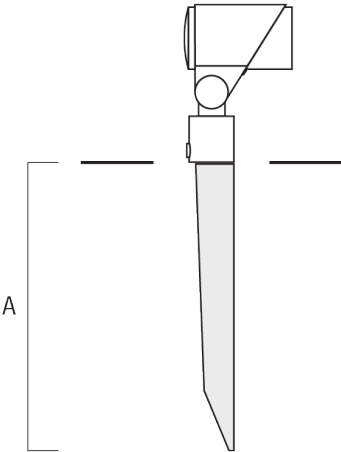


Junction box JB1

| Description                      | Part ID  | A   | B  | C1  | D1 | Weight (kg) |
|----------------------------------|----------|-----|----|-----|----|-------------|
| Junction box JB1 with side entry | 310-9002 | 107 | 67 | 135 | 67 | 1.20        |

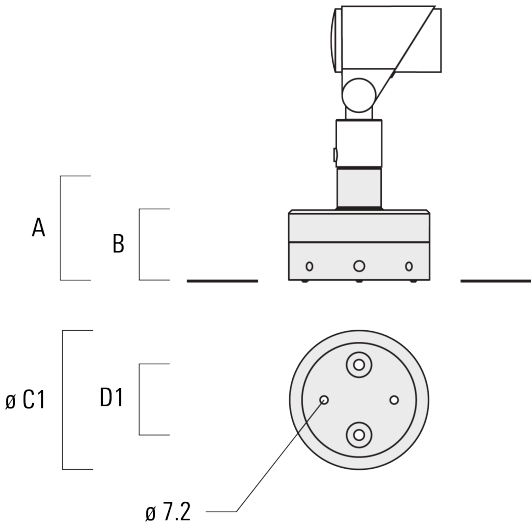

FLC311 Spigot mounted


| Description                      | Part ID  | A   | B  | C1  | D1 | Weight (kg) |
|----------------------------------|----------|-----|----|-----|----|-------------|
| Junction box JB1 with wall entry | 310-9025 | 107 | 67 | 135 | 67 | 1.10        |

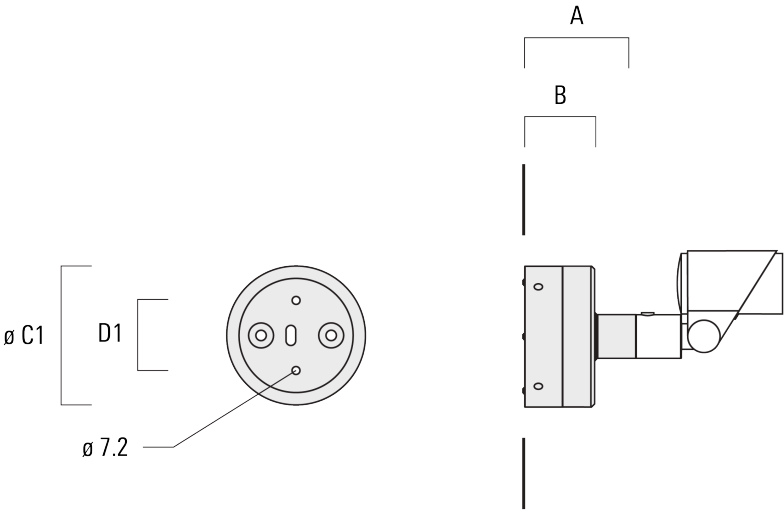


Optical Accessories

Flood lens

| Description            | Part ID  | C1 |
|------------------------|----------|----|
| IO-360-FLC311 for [EE] | 145-7786 | 59 |




|                         |          |    |
|-------------------------|----------|----|
| IO-360-FLC311 for [EES] | 145-7780 | 59 |
|-------------------------|----------|----|




Linear spread lens

| Description   | Part ID  | C1 |
|---------------|----------|----|
| IO-180-FLC311 | 145-7781 | 59 |



Wallwash lens


| Description  | Part ID  | C1 |
|--------------|----------|----|
| IO-20-FLC311 | 145-7782 | 59 |



FLC311 Spigot mounted


Honeycomb louvre

| Description | Part ID  | C1 |
|-------------|----------|----|
| IW-FLC311   | 145-7783 | 59 |



Glare shield

| Description | Part ID  | A  | C1 |
|-------------|----------|----|----|
| ES-FLC311   | 145-7784 | 34 | 85 |

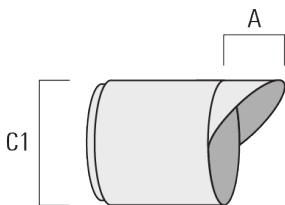




FLC311 Spigot mounted

Snoot

| Description | Part ID  | A  | C1 |
|-------------|----------|----|----|
| ET-FLC311   | 145-7785 | 34 | 85 |

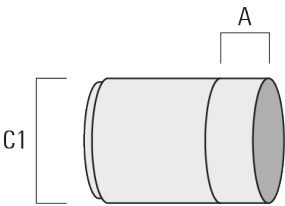

145-7615



FLC311 Spigot mounted

Control

0-10 V, 24VDC low voltage version

| Description                       | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033    |