

FLC311 Spigot mounted

**Description**

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Including 5 ft of flexible PVC free cable.

Optical accessories are factory-installed. To be specified at time of ordering.



6-12W / 120V / 0-10V Dimming.

6W / 24V DC / 0-10V Dimming. (available upon request)

Contact the factory for 277V/347V options.

Weight	1.60 lb
Light distribution	symmetric, very narrow beam [VN]
Light source	LED-3/9W / 250 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	3
Rated input power	11 W
Nominal Lumen (lm)	
LED Lumen	365
Total Lumen	1095
T _j	85
Delivered lumens (lm)	
LED Lumen	283.2
Total Lumen	849.6
T _a	25

FLC311 Spigot mounted

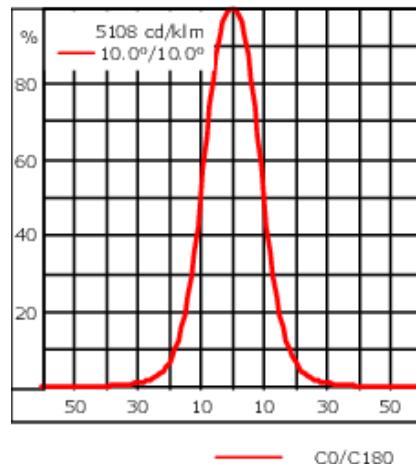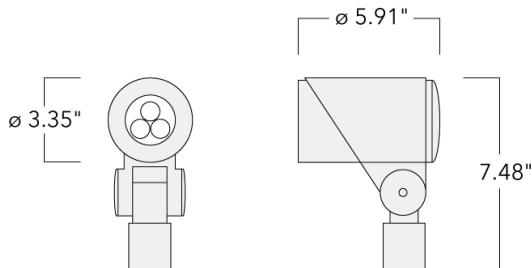**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Black </div> <div style="text-align: center;"> RAL9007 Grey Metallic </div> <div style="text-align: center;"> RAL9016 White </div> <div style="text-align: center;"> RAL8019 Dark Bronze </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.215 ft ²

Electrical description

Power supply	120-277VAC/50-60 Hz (24V DC available upon request)
Driver / Ballast	Integral [ECG] electronic driver 120V-277V. (24VDC low voltage, available upon request)
Power factor	>0.9

FLC311 Spigot mounted**Additional information**


Lifetime	Ta=25°/40° L90B10 > 90000h
Dimming	0-10V as standard
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

FLC311 Spigot mounted**Mounting Accessories****Threaded Nipple**

Description	Part ID	Weight (lb)
3/4 inch Threaded Nipple	145-6903	0.24
1/2 inch Threaded Nipple	145-6902	0.2



Flat surface and Column fitter

Description	Part ID	A	B	D1	D2	M1	Weight (lb)
Column fitter FLC300	145-9536	70		≥ 3.0	2.75	0.23	.44 lbs

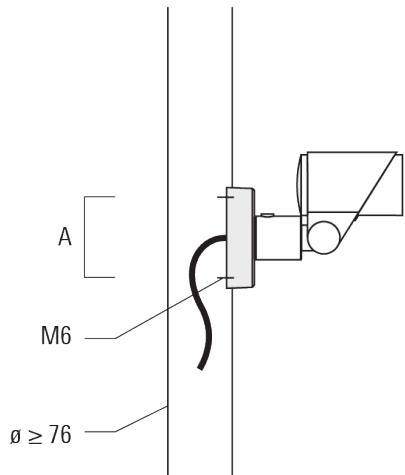


FLC311 Spigot mounted

Description	Part ID	A	B	D1	D2	M1	Weight(lb)
Flat surface fitter FLC300	145-9535	100	85				0.20

**Ground spike EF**


Description	Part ID	A	Weight(lb)
Ground spike EF1 for FLC300	310-9102	10.63	1.20

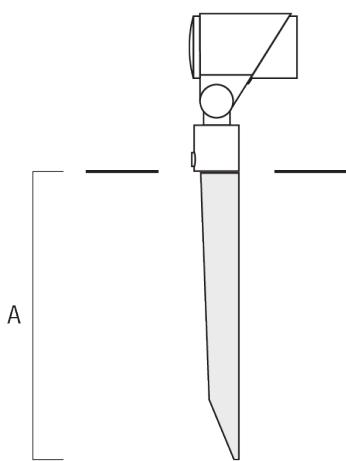


FLC311 Spigot mounted

Junction box JB1

Description	Part ID	A	B	C1	D1	Weight(lb)
Junction box JB1 with side entry	310-9002	4.21	2.64	5.31	2.64	1.20


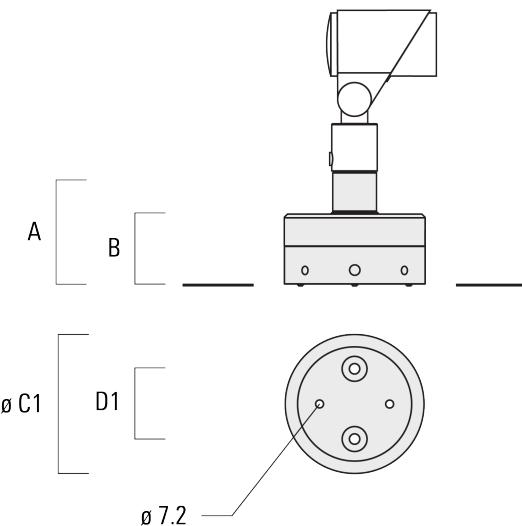


Junction box JB1 with wall entry	310-9025	4.21	2.64	5.31	2.64	1.10
----------------------------------	----------	------	------	------	------	------

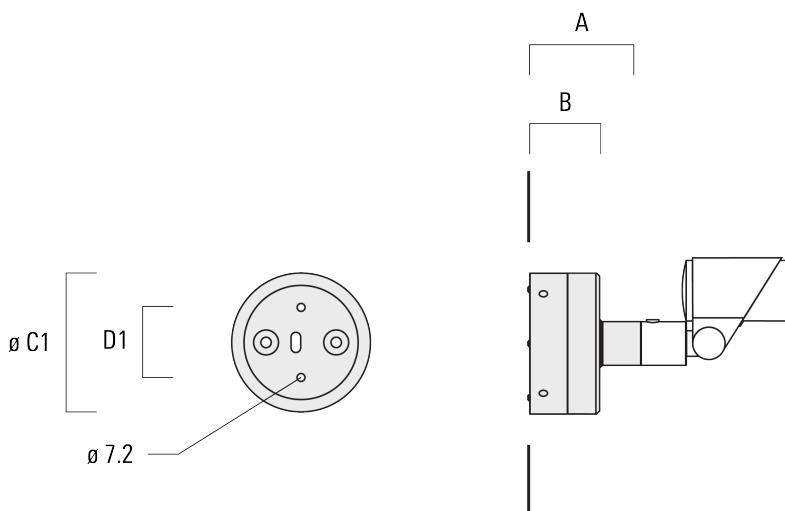

FLC311 Spigot mounted

Description	Part ID	A	B	C1	D1	Weight(lb)
Junction box JB1 with side entry (conduit)	310-9022	4.21	2.64	5.31	2.64	1.20

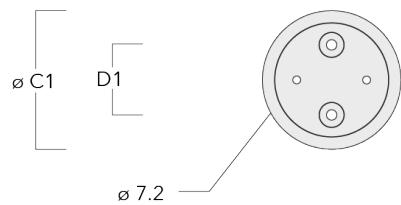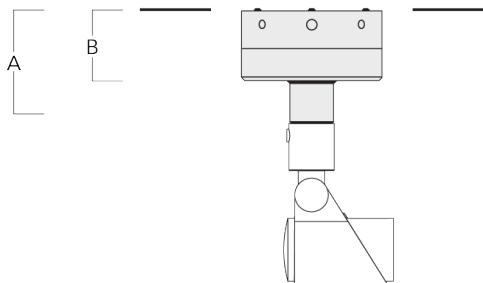

FLC311 Spigot mounted**Control****DALI interface**


Description	Part ID
Low voltage DALI interface	0026

0-10 V, 24VDC low voltage version


Description	Part ID
24VDC low voltage version, 0-10 V	0033

FLC311 Spigot mounted**Optical Accessories****Softening Lens**

Description	Part ID	C1
Flood lens IO-360 for [EE]	145-7786	59




Flood lens IO-360 for [EES] 145-7780 59




FLC311 Spigot mounted**Linear spread lens**

Description	Part ID	C1
Linear spread lens IO-180	145-7781	59


**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	145-7782	59




FLC311 Spigot mounted**Honeycomb louvre**

Description	Part ID	C1
Honeycomb louvre IW	145-7783	59

**Glare shield**

Description	Part ID	A	C1
Glare shield ES	145-7784	34	85



FLC311 Spigot mounted

Snoot

Description	Part ID	A	C1
Snoot ET	145-7785	34	85

