



Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Including 1.5 m of flexible PVC free cable.



Mains voltage versions, DALI interface Class I. 1-10 V analogue dimming available on request; refer to accessory listings.

DALI interface Class II available on request; refer to accessory listings.

24VDC low voltage versions, 0-10 V analogue dimming or DALI interface Class III available on request.

Remote 24VDC power supply to be ordered separately.

|                    |                                  |
|--------------------|----------------------------------|
| Weight             | 1.60 kg                          |
| Light distribution | symmetric, very narrow beam [EE] |
| Light source       | LED-3/9W / 250 mA - 3000 K       |
| CRI                | 80                               |
| Power supply       | EC                               |
| LEDs               | 3                                |
| Rated input power  | 11 W                             |
| Nominal Lumen (lm) |                                  |
| LED Lumen          | 365                              |
| Total Lumen        | 1095                             |
| Tj                 | 85                               |
| Rated lumens (lm)  |                                  |
| LED Lumen          | 283.2                            |
| Total Lumen        | 849.6                            |
| Ta                 | 25                               |

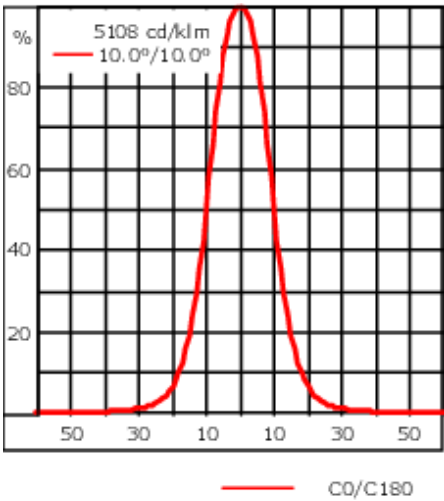

Specifications

Material description

|                      |                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                |
| Lens                 | Safety glass lens                                                                                                                                                                     |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                                                                           |
| Fasteners            | PCS hardware                                                                                                                                                                          |
| Ingress protection   | IP66                                                                                                                                                                                  |
| Impact resistance    | IK08                                                                                                                                                                                  |
| Corrosion resistance | 5CE                                                                                                                                                                                   |
| Windage              | 0.020 m <sup>2</sup>                                                                                                                                                                  |

Electrical description

|                  |                |
|------------------|----------------|
| Driver / Ballast | DALI interface |
| Power factor     | >0.9           |

Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
|----------|------------------------|

## Control

### 1-10 V analogue dimming interface

| Description                       | Part ID  | C  |
|-----------------------------------|----------|----|
| 1-10 V analogue dimming interface | 430-0011 | 90 |

### DALI interface

| Description                | Part ID   |
|----------------------------|-----------|
| Low voltage DALI interface | 0026      |
| DALI Class II              | 0043+0013 |

### 0-10 V, 24VDC low voltage version

| Description                       | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033    |


Mounting Accessories

Flat surface and Column fitter

| Description          | Part ID  | A  | B | Weight (kg) |
|----------------------|----------|----|---|-------------|
| Column fitter FLC300 | 145-9536 | 70 |   | 0.20        |




|                            |          |     |    |      |
|----------------------------|----------|-----|----|------|
| Flat surface fitter FLC300 | 145-9535 | 100 | 85 | 0.20 |
|----------------------------|----------|-----|----|------|

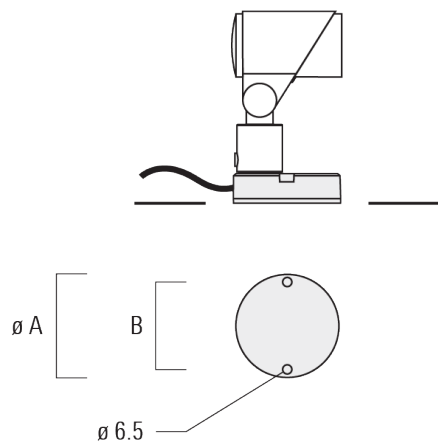

FLC311 Spigot mounted


Ground spike

| Description                 | Part ID  | A   | Weight (kg) |
|-----------------------------|----------|-----|-------------|
| Ground spike EF1 for FLC300 | 310-9102 | 270 | 1.20        |

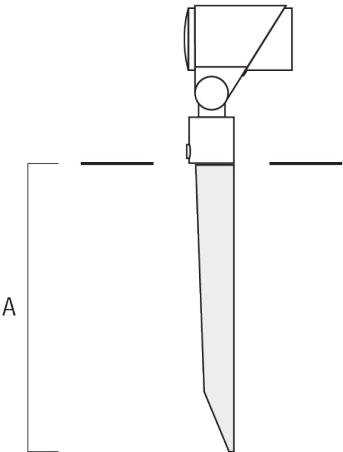

Junction box

| Description                      | Part ID  | A   | B  | C1  | D1 | Weight (kg) |
|----------------------------------|----------|-----|----|-----|----|-------------|
| Junction box JB1 with side entry | 310-9002 | 107 | 67 | 135 | 67 | 1.20        |

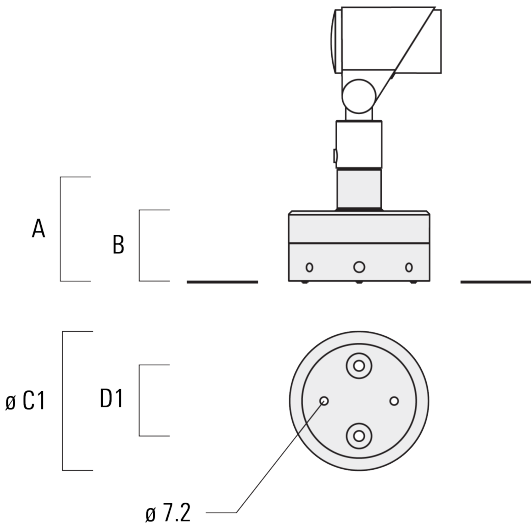


FLC311 Spigot mounted

| Description                      | Part ID  | A   | B  | C1  | D1 | Weight (kg) |
|----------------------------------|----------|-----|----|-----|----|-------------|
| Junction box JB1 with wall entry | 310-9025 | 107 | 67 | 135 | 67 | 1.10        |



|                                               |          |     |    |     |    |      |
|-----------------------------------------------|----------|-----|----|-----|----|------|
| Junction box JB1 with side entry<br>(conduit) | 310-9022 | 107 | 67 | 135 | 67 | 1.20 |
|-----------------------------------------------|----------|-----|----|-----|----|------|

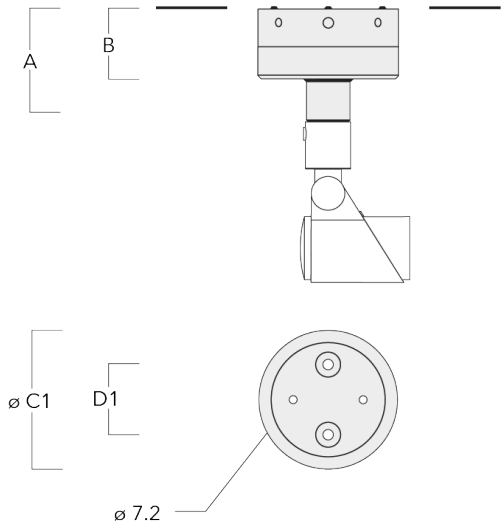

Optical Accessories

Flood lens

| Description                | Part ID  | C1 |
|----------------------------|----------|----|
| Flood lens IO-360 for [EE] | 145-7786 | 59 |



|                             |          |    |
|-----------------------------|----------|----|
| Flood lens IO-360 for [EES] | 145-7780 | 59 |
|-----------------------------|----------|----|



FLC311 Spigot mounted

Linear spread lens

| Description               | Part ID  | C1 |
|---------------------------|----------|----|
| Linear spread lens IO-180 | 145-7781 | 59 |



Wallwash lens

| Description         | Part ID  | C1 |
|---------------------|----------|----|
| Wallwash lens IO-20 | 145-7782 | 59 |



FLC311 Spigot mounted


Honeycomb louvre

| Description         | Part ID  | C1 |
|---------------------|----------|----|
| Honeycomb louvre IW | 145-7783 | 59 |



Glare shield

| Description     | Part ID  | A  | C1 |
|-----------------|----------|----|----|
| Glare shield ES | 145-7784 | 34 | 85 |



FLC311 Spigot mounted

Snoot

| Description | Part ID  | A  | C1 |
|-------------|----------|----|----|
| Snoot ET    | 145-7785 | 34 | 85 |

