



Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Including 5 ft of flexible PVC free cable.


Optical accessories are factory-installed. To be specified at time of ordering.

6-12W / 120V / 0-10V Dimming.
6W / 24V DC / 0-10V Dimming. (available upon request)

Contact the factory for 277V/347V options.

| | |
|-----------------------|----------------------------------|
| Weight | 1.60 lb |
| Light distribution | symmetric, very narrow beam [VN] |
| Light source | LED-3/12W / 350 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 3 |
| Rated input power | 13.9 W |
| Nominal Lumen (lm) | |
| LED Lumen | 530 |
| Total Lumen | 1590 |
| Tj | 85 |
| Delivered lumens (lm) | |
| LED Lumen | 411.2 |
| Total Lumen | 1233.6 |
| Ta | 25 |

FLC311 Spigot mounted

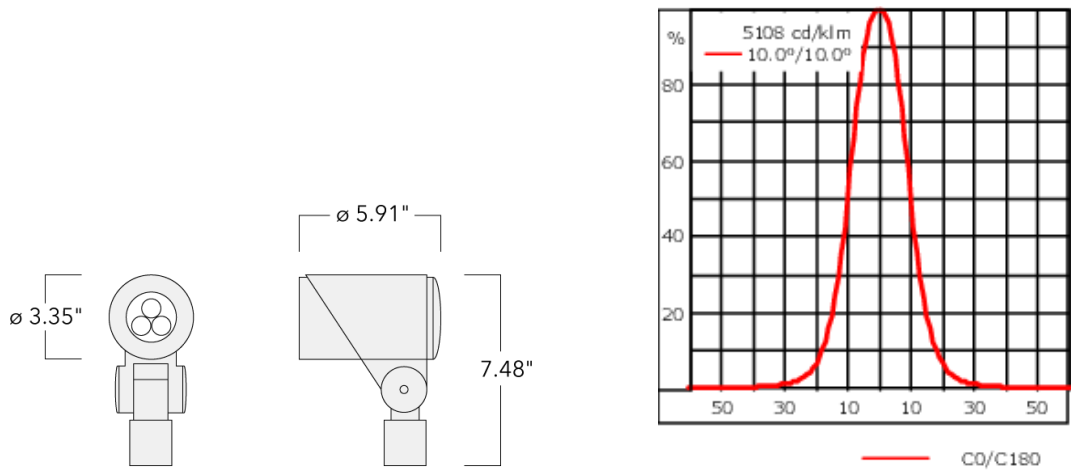

Specifications
Material description

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS hardware |
| Ingress protection | IP66 |
| Impact resistance | IK08 |
| Corrosion resistance | 5CE |
| Windage | 0.215 ft² |

Electrical description

| | |
|------------------|---|
| Power supply | 120-277VAC/50-60 Hz (24V DC available upon request) |
| Driver / Ballast | Integral [ECG] electronic driver 120V-277V. (24VDC low voltage, available upon request) |
| Power factor | >0.9 |

FLC311 Spigot mounted

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Dimming | 0-10V as standard |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

FLC311 Spigot mounted


Mounting Accessories

Threaded Nipple

| Description | Part ID | Weight (lb) |
|--------------------------|----------|-------------|
| 3/4 inch Threaded Nipple | 145-6903 | 0.24 |
| 1/2 inch Threaded Nipple | 145-6902 | 0.2 |


Flat surface and Column fitter

| Description | Part ID | A | B | D1 | D2 | M1 | Weight (lb) |
|----------------------|----------|----|---|-------|------|------|-------------|
| Column fitter FLC300 | 145-9536 | 70 | | ≥ 3.0 | 2.75 | 0.23 | .44 lbs |

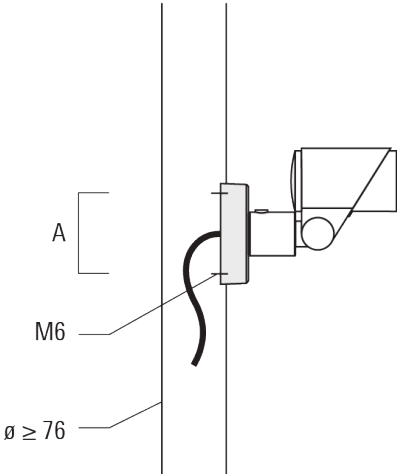


FLC311 Spigot mounted

| Description | Part ID | A | B | D1 | D2 | M1 | Weight (lb) |
|----------------------------|----------|-----|----|----|----|----|-------------|
| Flat surface fitter FLC300 | 145-9535 | 100 | 85 | | | | 0.20 |

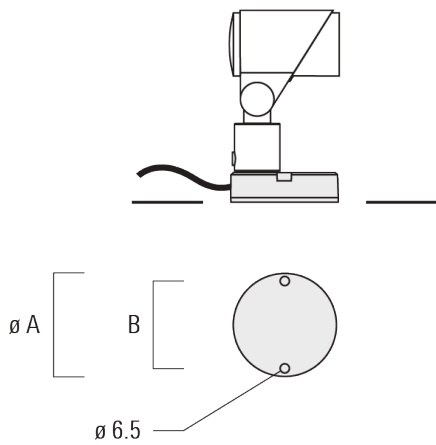

Ground spike EF


| Description | Part ID | A | Weight (lb) |
|-----------------------------|----------|-------|-------------|
| Ground spike EF1 for FLC300 | 310-9102 | 10.63 | 1.20 |

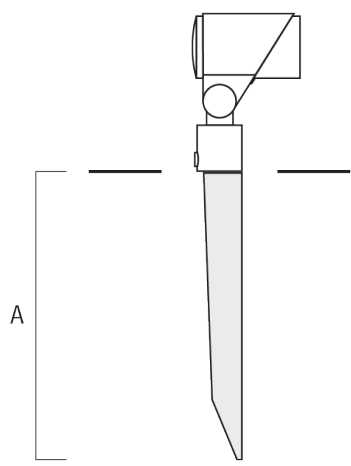

FLC311 Spigot mounted

Junction box JB1

| Description | Part ID | A | B | C1 | D1 | Weight (lb) |
|----------------------------------|----------|------|------|------|------|-------------|
| Junction box JB1 with side entry | 310-9002 | 4.21 | 2.64 | 5.31 | 2.64 | 1.20 |

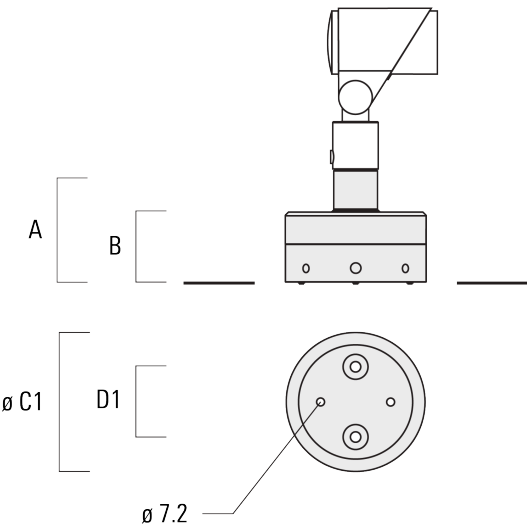


| | | | | | | |
|----------------------------------|----------|------|------|------|------|------|
| Junction box JB1 with wall entry | 310-9025 | 4.21 | 2.64 | 5.31 | 2.64 | 1.10 |
|----------------------------------|----------|------|------|------|------|------|



FLC311 Spigot mounted

| Description | Part ID | A | B | C1 | D1 | Weight (lb) |
|---|----------|------|------|------|------|-------------|
| Junction box JB1 with side entry (conduit) | 310-9022 | 4.21 | 2.64 | 5.31 | 2.64 | 1.20 |

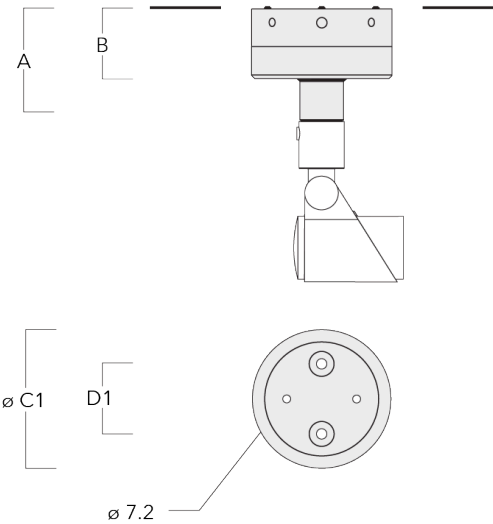

FLC311 Spigot mounted

Control

DALI interface

| Description | Part ID |
|----------------------------|---------|
| Low voltage DALI interface | 0026 |


0-10 V, 24VDC low voltage version

| Description | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033 |

Optical Accessories

Softening Lens

| Description | Part ID | C1 |
|----------------------------|----------|----|
| Flood lens IO-360 for [EE] | 145-7786 | 59 |




| | | |
|-----------------------------|----------|----|
| Flood lens IO-360 for [EES] | 145-7780 | 59 |
|-----------------------------|----------|----|



FLC311 Spigot mounted


Linear spread lens

| Description | Part ID | C1 |
|---------------------------|----------|----|
| Linear spread lens IO-180 | 145-7781 | 59 |



Wallwash lens


| Description | Part ID | C1 |
|---------------------|----------|----|
| Wallwash lens IO-20 | 145-7782 | 59 |



FLC311 Spigot mounted


Honeycomb louvre

| Description | Part ID | C1 |
|---------------------|----------|----|
| Honeycomb louvre IW | 145-7783 | 59 |



Glare shield

| Description | Part ID | A | C1 |
|-----------------|----------|----|----|
| Glare shield ES | 145-7784 | 34 | 85 |



FLC311 Spigot mounted

Snoot

| Description | Part ID | A | C1 |
|-------------|----------|----|----|
| Snoot ET | 145-7785 | 34 | 85 |

