

## FLC321 Wall bracket

**Description**

IP66. IK08. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Two cable entries.



Mains voltage versions, ON-OFF Class I. 1-10 V analogue dimming or DALI interface available on request; refer to accessory listings.

Knuckle permits 340° rotation, forward tilt 54° and backward tilt 90°.

Optical accessories are factory-installed. To be specified at time of ordering.

Weight	2.60 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-6/12W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	14.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	310
Total Lumen	1860
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	234.4
Total Lumen	1406.2
T <sub>a</sub>	25

**FLC321 Wall bracket**

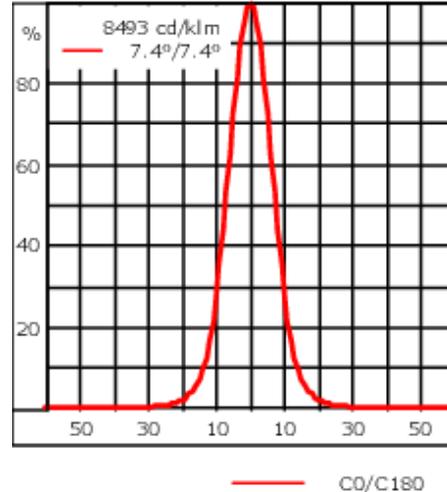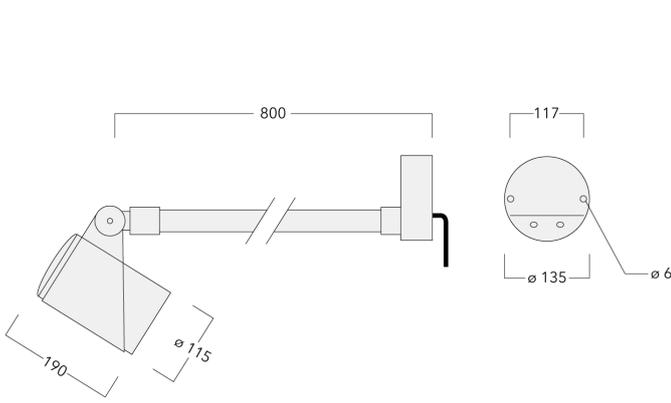

**Specifications**

**Material description**

Body	Marine-grade, all aluminium construction
Lens	Safety glass lens
Colours	<div style="display: flex; flex-direction: column; gap: 5px;"> <div><span style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></span> RAL9004 Signal black</div> <div><span style="display: inline-block; width: 15px; height: 15px; background-color: #cccccc; margin-right: 5px;"></span> RAL9006 White aluminium</div> <div><span style="display: inline-block; width: 15px; height: 15px; background-color: #808080; margin-right: 5px;"></span> RAL9007 Grey aluminium</div> <div><span style="display: inline-block; width: 15px; height: 15px; background-color: #333333; margin-right: 5px;"></span> RAL7016 Anthracite grey</div> <div><span style="display: inline-block; width: 15px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></span> RAL9016 Traffic white</div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

**Electrical description**

Driver / Ballast	DALI
------------------	------

**Additional information**

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

**145-7916**

**FLC321 Wall bracket**

---

**Control**

**0-10 V, 24VDC low voltage version**


---

Description	Part ID
24VDC low voltage version, 0-10 V	0033


---

**Optical Accessories****Flood lens**

Description	Part ID	C1
IO-360-FLC321	145-9992	87

**Linear spread lens**


Description	Part ID	C1
IO-180-FLC321	145-9991	87



## FLC321 Wall bracket


## Wallwash lens

Description	Part ID	C1
IO-20-FLC321	145-9993	87



## Honeycomb louvre


Description	Part ID	C1
Honeycomb louvre IW	145-9994	87



**FLC321 Wall bracket**

**Glare shield**

Description	Part ID	A	C1
ES-FLC321	145-9995	55	114

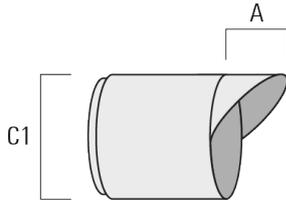

**Snoot**

Description	Part ID	A	C1
ET-FLC321	145-9996	56	114

