

FLC321 Surface mounted



Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Knuckle permits 350° rotation, forward tilt 38° and backward tilt 90°.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. One cable entry.

Optical accessories are factory-installed. To be specified at time of ordering.

|                    |                                                  |
|--------------------|--------------------------------------------------|
| Weight             | 3.10 kg                                          |
| Light distribution | symmetric, very narrow beam, sharp cut-off [EES] |
| Light source       | LED-6/26W / 1400 mA - 4000K                      |
| CRI                | 80                                               |
| Power supply       | EC                                               |
| LEDs               | 6                                                |
| Rated input power  | 27 W                                             |

|                    |       |
|--------------------|-------|
| Nominal Lumen (lm) |       |
| LED Lumen          | 575   |
| Total Lumen        | 3450  |
| Tj                 | 85    |
| Rated lumens (lm)  |       |
| LED Lumen          | 427.5 |
| Total Lumen        | 2565  |
| Ta                 | 25    |

FLC321 Surface mounted

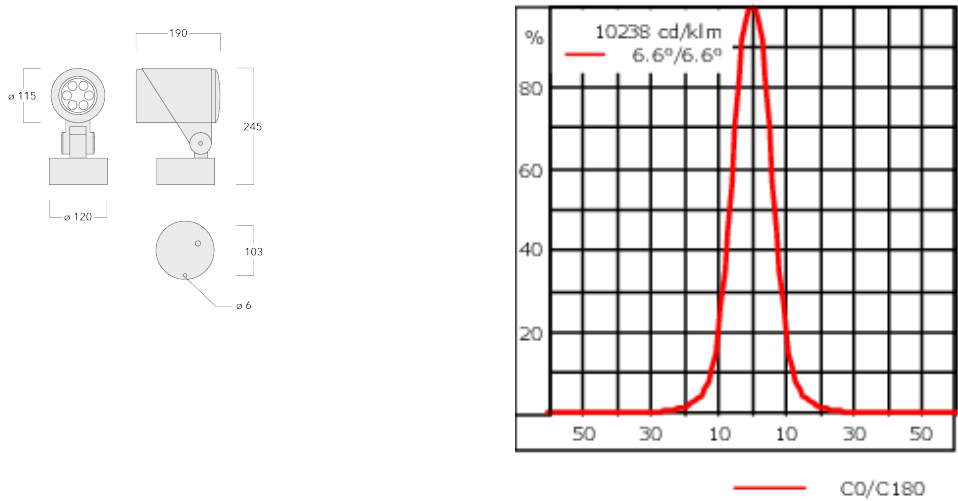

Specifications  
Material description

|                      |                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                                                               |
| Lens                 | Safety glass lens                                                                                                                                                                                                                    |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                                                                                                                          |
| Fasteners            | PCS hardware                                                                                                                                                                                                                         |
| Ingress protection   | IP66                                                                                                                                                                                                                                 |
| Impact resistance    | IK08                                                                                                                                                                                                                                 |
| Corrosion resistance | 5CE                                                                                                                                                                                                                                  |
| Windage              | 0.045 m <sup>2</sup>                                                                                                                                                                                                                 |

Electrical description

|                  |      |
|------------------|------|
| Driver / Ballast | DALI |
| Power factor     | >0.9 |


Additional information

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source)     |

Mounting Accessories


Planted root

| Description       | Part ID  | D1  | D2  | D3  | D4  | H1  | H2  | M1 | Weight(kg) |
|-------------------|----------|-----|-----|-----|-----|-----|-----|----|------------|
| Planted root ESV4 | 300-0461 | 145 | 130 | 102 | 108 | 400 | 350 | 8  | 7.85       |

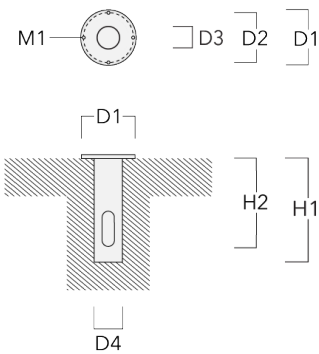

Short post EM


| Description                   | Part ID  | A  | B   | C1  | D1  | Weight (kg) |
|-------------------------------|----------|----|-----|-----|-----|-------------|
| Short post EM1 for FLC311/321 | 146-7169 | 26 | 200 | 120 | 160 | 1.80        |

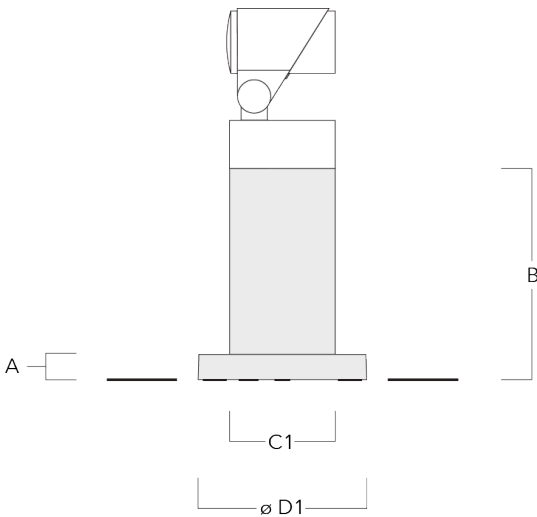


FLC321 Surface mounted

Pole clamp SP

| Description                         | Part ID  | D1    | Weight (kg) |
|-------------------------------------|----------|-------|-------------|
| Pole clamp SP1-M5, single (Ø 38-60) | 146-7201 | 38-60 | 1.20        |

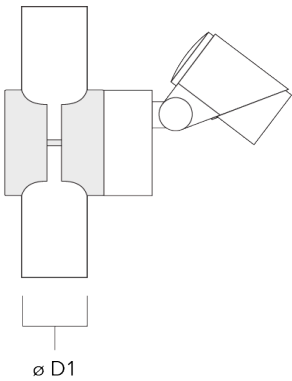


|                                     |          |       |      |
|-------------------------------------|----------|-------|------|
| Pole clamp SP1-M5, single (Ø 76-89) | 146-7202 | 76-89 | 1.10 |
|-------------------------------------|----------|-------|------|

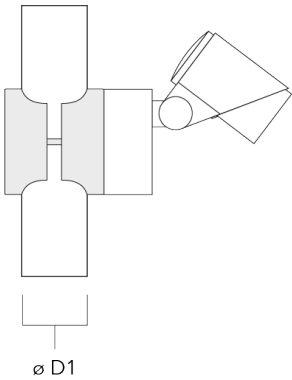


FLC321 Surface mounted

| Description                         | Part ID  | D1    | Weight (kg) |
|-------------------------------------|----------|-------|-------------|
| Pole clamp SP2-M5, double (Ø 38-60) | 146-7203 | 38-60 | 1.30        |

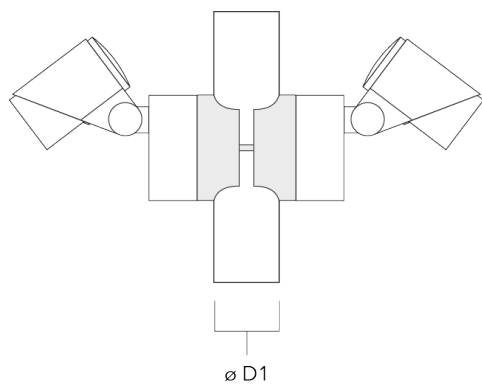

|                                     |          |       |      |
|-------------------------------------|----------|-------|------|
| Pole clamp SP2-M5, double (Ø 76-89) | 146-7204 | 76-89 | 1.20 |
|-------------------------------------|----------|-------|------|

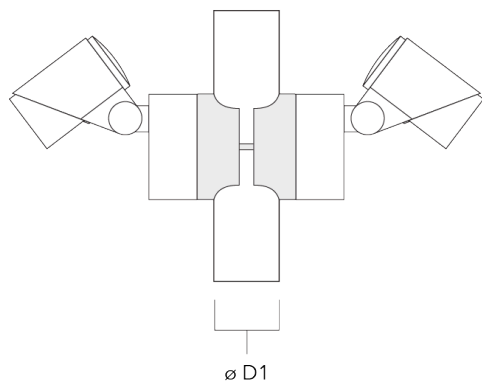

Control


0-10 V, 24VDC low voltage version

| Description                       | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033    |

Optical Accessories


Flood lens

| Description   | Part ID  | C1 |
|---------------|----------|----|
| IO-360-FLC321 | 145-9992 | 87 |



Linear spread lens

| Description   | Part ID  | C1 |
|---------------|----------|----|
| IO-180-FLC321 | 145-9991 | 87 |



FLC321 Surface mounted


Wallwash lens

| Description  | Part ID  | C1 |
|--------------|----------|----|
| IO-20-FLC321 | 145-9993 | 87 |



Honeycomb louvre

| Description         | Part ID  | C1 |
|---------------------|----------|----|
| Honeycomb louvre IW | 145-9994 | 87 |





FLC321 Surface mounted

Glare shield

| Description | Part ID  | A  | C1  |
|-------------|----------|----|-----|
| ES-FLC321   | 145-9995 | 55 | 114 |



Snoot

| Description | Part ID  | A  | C1  |
|-------------|----------|----|-----|
| ET-FLC321   | 145-9996 | 56 | 114 |

