

FLC321 Wall bracket



Description

IP66. IK08. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Two cable entries.

12W, 18W, 26W / 120-277V / 0-10V Dimming.

24VDC low voltage versions, ON-OFF. (available upon request)


Knuckle permits 340° rotation, forward tilt 54° and backward tilt 90°.

Remote 24VDC power supply to be ordered separately.

Optical accessories are factory-installed. To be specified at time of ordering.

|                       |                                  |
|-----------------------|----------------------------------|
| Weight                | 9.00 lb                          |
| Light distribution    | symmetric, very narrow beam [VN] |
| Light source          | LED-6/26W / 1400 mA - 3000K      |
| CRI                   | 80                               |
| Power supply          | electronic gear                  |
| LEDs                  | 6                                |
| Rated input power     | 27 W                             |
| Nominal Lumen (lm)    |                                  |
| LED Lumen             | 550                              |
| Total Lumen           | 3300                             |
| Tj                    | 85                               |
| Delivered lumens (lm) |                                  |
| LED Lumen             | 398.1                            |
| Total Lumen           | 2388.8                           |
| Ta                    | 25                               |

FLC321 Wall bracket

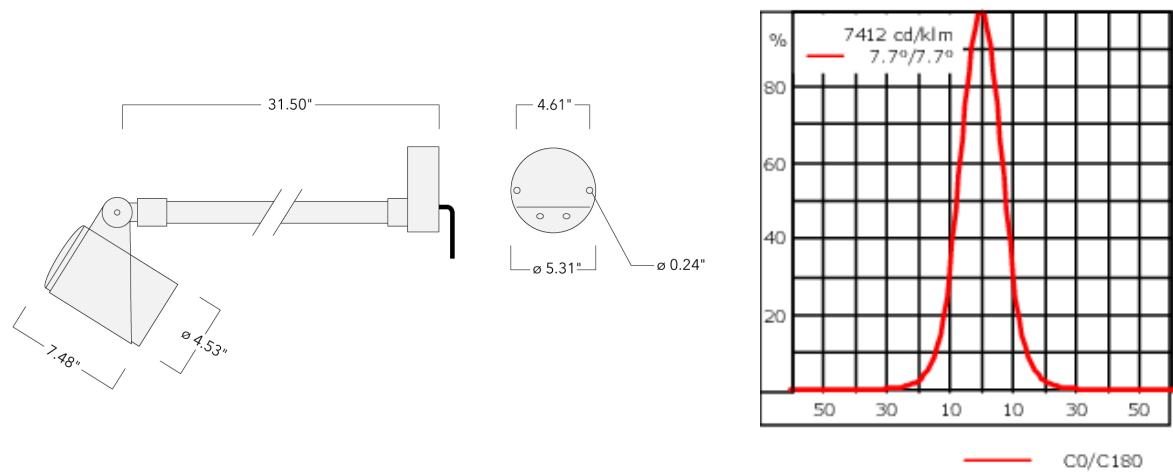

Specifications  
Material description

|                      |                                                                                                                        |
|----------------------|------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, all aluminium construction                                                                               |
| Lens                 | Safety glass lens                                                                                                      |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                            |
| Fasteners            | PCS hardware                                                                                                           |
| Ingress protection   | IP66                                                                                                                   |
| Impact resistance    | IK08                                                                                                                   |
| Corrosion resistance | 5CE                                                                                                                    |
| Windage              | 0.969 ft²                                                                                                              |

Electrical description

|                  |                                                     |
|------------------|-----------------------------------------------------|
| Driver / Ballast | 120-277V AC/50-60 Hz (24VDC available upon request) |
|------------------|-----------------------------------------------------|

Additional information

|          |                                                            |
|----------|------------------------------------------------------------|
| Lifetime | Ta=25°/40° L90B10 > 90000h                                 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

FLC321 Wall bracket

Control

DALI interface

| Description                | Part ID |
|----------------------------|---------|
| Low voltage DALI interface | 0026    |


0-10 V, 24VDC low voltage version

| Description                       | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033    |

Optical Accessories

Softening Lens


| Description       | Part ID  | C1   |
|-------------------|----------|------|
| Flood lens IO-360 | 145-9992 | 3.43 |



FLC321 Wall bracket


Linear spread lens

| Description               | Part ID  | C1   |
|---------------------------|----------|------|
| Linear spread lens IO-180 | 145-9991 | 3.43 |



Wallwash lens


| Description         | Part ID  | C1   |
|---------------------|----------|------|
| Wallwash lens IO-20 | 145-9993 | 3.43 |



FLC321 Wall bracket


Honeycomb louvre

| Description         | Part ID  | C1   |
|---------------------|----------|------|
| Honeycomb louvre IW | 145-9994 | 3.43 |



Glare shield

| Description     | Part ID  | A    | C1   |
|-----------------|----------|------|------|
| Glare shield ES | 145-9995 | 2.17 | 4.49 |



FLC321 Wall bracket

Snoot

| Description | Part ID  | A    | C1   |
|-------------|----------|------|------|
| Snoot ET    | 145-9996 | 2.20 | 4.49 |

