

FLC321 Space frame



Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.



Mains voltage versions, ON-OFF Class I. 1-10 V analogue dimming or DALI interface available on request; refer to accessory listings.

Optical accessories are factory-installed. To be specified at time of ordering.

Including terminal box, for mounting on ø 48-60 mm pipes or space frames.

Weight	4.30 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-6/26W / 1400 mA - 4000K
CRI	80
Power supply	EC
LEDs	6
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	575
Total Lumen	3450
Tj	85
Rated lumens (lm)	
LED Lumen	307
Total Lumen	1842
Ta	25

FLC321 Space frame

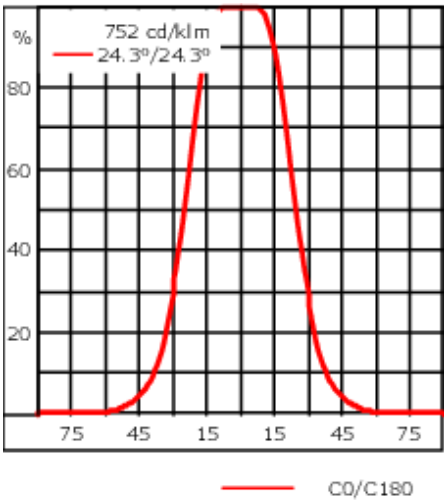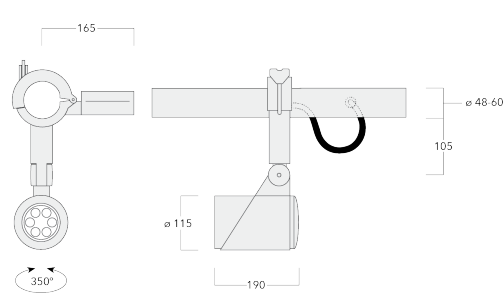

Specifications
Material description

Table with 2 columns: Component and Description. Rows include Body (Marine-grade, die-cast aluminium alloy), Lens (Safety glass lens), Colours (RAL9004 Signal black, RAL9006 White aluminium, RAL9007 Grey aluminium, RAL7016 Anthracite grey, RAL9016 Traffic white), Gasket (Silicone CCG® Controlled Compression Gasket), Fasteners (PCS hardware), Ingress protection (IP66), Impact resistance (IK08), Corrosion resistance (5CE), and Windage (0.065 m²).

Electrical description

Table with 2 columns: Component and Description. Row includes Driver / Ballast (DALI).

Additional information

Table with 2 columns: Component and Description. Rows include Lifetime (Ta=25° L90B10 > 90000h) and Energy efficiency class (C-D (Light source)).

Control

0-10 V, 24VDC low voltage version

Description	Part ID
24VDC low voltage version, 0-10 V	0033

Optical Accessories

Flood lens

Description	Part ID	C1
IO-360-FLC321	145-9992	87



Linear spread lens


Description	Part ID	C1
IO-180-FLC321	145-9991	87



FLC321 Space frame

Wallwash lens

Description	Part ID	C1
IO-20-FLC321	145-9993	87



Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	145-9994	87



FLC321 Space frame

Glare shield

Description	Part ID	A	C1
ES-FLC321	145-9995	55	114



Snoot

Description	Part ID	A	C1
ET-FLC321	145-9996	56	114

