



Description

IP66. IK08. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Two cable entries.



Mains voltage versions, ON-OFF Class I. 1-10 V analogue dimming or DALI interface available on request; refer to accessory listings.

Knuckle permits 340° rotation, forward tilt 54° and backward tilt 90°.

Optical accessories are factory-installed. To be specified at time of ordering.

| | |
|--------------------|----------------------------------|
| Weight | 3.20 kg |
| Light distribution | symmetric, very narrow beam [EE] |
| Light source | LED-3/6W / 180 mA - 3000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 3 |
| Rated input power | 7.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 260 |
| Total Lumen | 780 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 201.7 |
| Total Lumen | 605.2 |
| Ta | 25 |

FLC311 Wall bracket

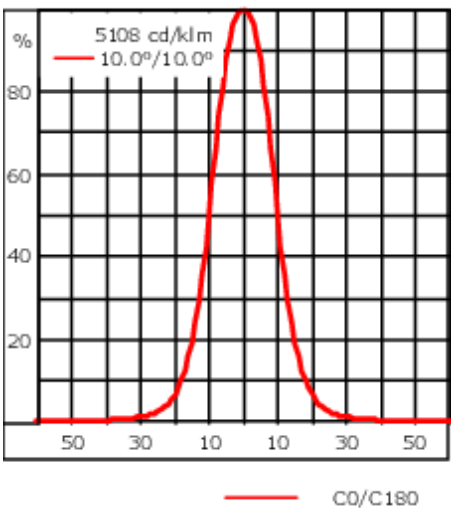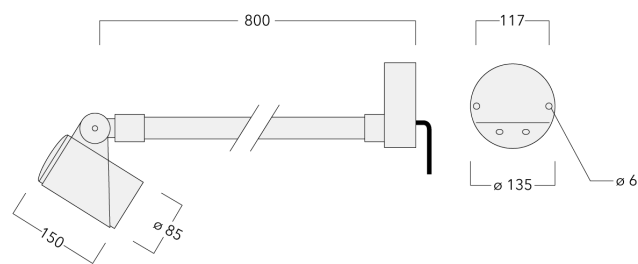

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, all aluminium construction |
| Lens | Safety glass lens |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS hardware |
| Ingress protection | IP66 |
| Impact resistance | IK08 |
| Corrosion resistance | 5CE |
| Windage | 0.065 m ² |

Electrical description

| | |
|------------------|------|
| Driver / Ballast | DALI |
|------------------|------|

Additional information

| | |
|-------------------------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
| Energy efficiency class | D-E (Light source) |


Optical Accessories

Flood lens

| Description | Part ID | C1 |
|------------------------|----------|----|
| IO-360-FLC311 for [EE] | 145-7786 | 59 |




| | | |
|-------------------------|----------|----|
| IO-360-FLC311 for [EES] | 145-7780 | 59 |
|-------------------------|----------|----|



FLC311 Wall bracket


Linear spread lens

| Description | Part ID | C1 |
|---------------|----------|----|
| IO-180-FLC311 | 145-7781 | 59 |



Wallwash lens


| Description | Part ID | C1 |
|--------------|----------|----|
| IO-20-FLC311 | 145-7782 | 59 |



FLC311 Wall bracket


Honeycomb louvre

| Description | Part ID | C1 |
|-------------|----------|----|
| IW-FLC311 | 145-7783 | 59 |



Glare shield


| Description | Part ID | A | C1 |
|-------------|----------|----|----|
| ES-FLC311 | 145-7784 | 34 | 85 |



FLC311 Wall bracket

Snoot

| Description | Part ID | A | C1 |
|-------------|----------|----|----|
| ET-FLC311 | 145-7785 | 34 | 85 |



145-7693

FLC311 Wall bracket

we-ef

Control

0-10 V, 24VDC low voltage version

| Description | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033 |

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 15/08/2025