

Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Mains voltage versions: DALI interface Class I.


Including terminal box, for mounting on ø 48-60 mm pipes or space frames.

Optical accessories are factory-installed. To be specified at time of ordering.

Weight	2.50 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-3/9W / 250 mA - 4000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	11 W
Nominal Lumen (lm)	
LED Lumen	390
Total Lumen	1170
Тј	85
Rated lumens (lm)	
LED Lumen	297.7
Total Lumen	893.1
Та	25

FLC311 Space frame

we-ef

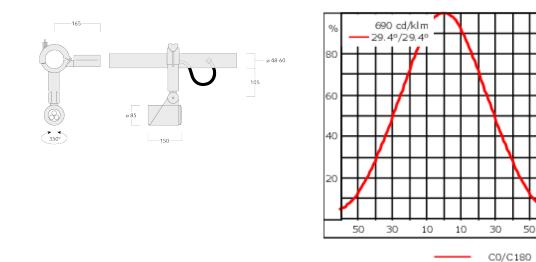

Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	RAL9004 Signal black RAL9006 White aluminium RAL9007 Grey aluminium
Gasket	Silicone CCG [®] Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE
Windage	0.045 m ²

Electrical description

Additional information

Lifetime

Ta=40° L90B10 > 90000h

FLC311 Space frame

Control

Eco Step Dim[®] Advanced

Description	Part ID
Eco Step Dim [®] Advanced LED	430-0002

1-10 V analogue dimming interface

0-10 V, 24VDC low voltage version

Description	Part ID
24VDC low voltage version, 0-10 V	0033

we-ef


FLC311 Space frame




Optical Accessories

Surface wash lens

Description	Part ID	C1
Flood lens IO-360 for [EE]	145-7786	59




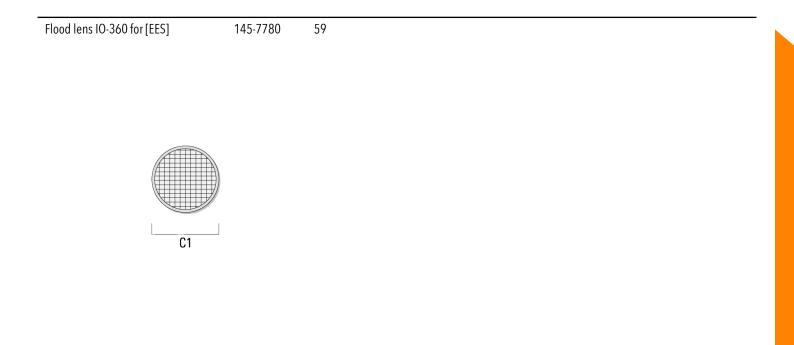

FLC311 Space frame




Linear spread lens



Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	145-7782	59




FLC311 Space frame




Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	145-7783	59



Glare shield

Description	А	C1
are shield ES	34	1 85



FLC311 Space frame



Snoot

