

FLC321 Wall bracket



Description

IP66. IK08. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Two cable entries.

Mains voltage versions: DALI interface Class I.  
24VDC low voltage versions: ON-OFF Class III.


Knuckle permits 340° rotation, forward tilt 54° and backward tilt 90°.  
Remote 24VDC power supply to be ordered separately.  
Optical accessories are factory-installed. To be specified at time of ordering.

|                    |                                      |
|--------------------|--------------------------------------|
| Weight             | 2.60 kg                              |
| Light distribution | linear spread, very narrow beam [EE] |
| Light source       | LED-6/12W / 700 mA - 3000 K          |
| CRI                | 80                                   |
| Power supply       | EC                                   |
| LEDs               | 6                                    |
| Rated input power  | 14.5 W                               |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 290  |
| Total Lumen        | 1740 |
| Tj                 | 85   |

|                   |        |
|-------------------|--------|
| Rated lumens (lm) |        |
| LED Lumen         | 196.2  |
| Total Lumen       | 1177.2 |
| Ta                | 25     |

FLC321 Wall bracket

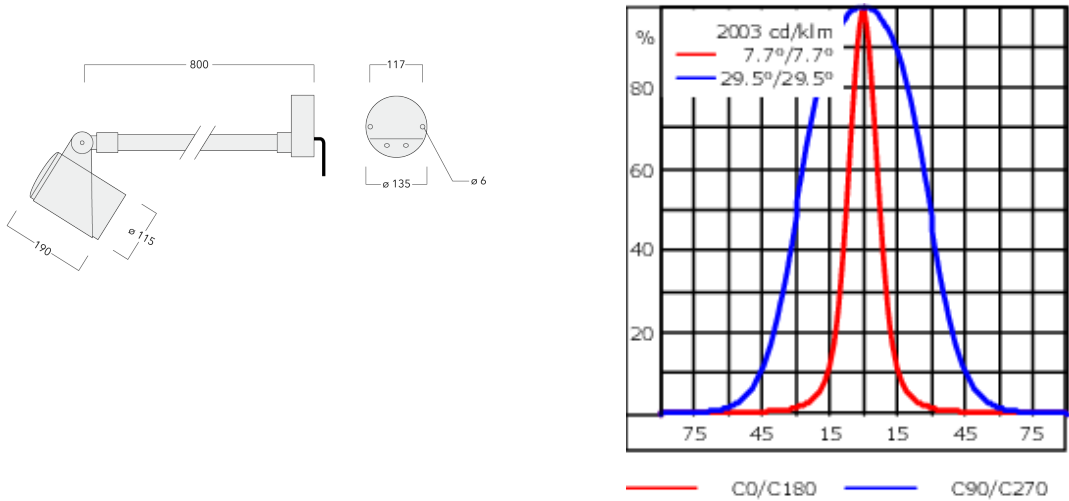

Specifications

Material description

|                      |                                                                                                                                          |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, all aluminium construction                                                                                                 |
| Lens                 | Safety glass lens                                                                                                                        |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                              |
| Fasteners            | PCS hardware                                                                                                                             |
| Ingress protection   | IP66                                                                                                                                     |
| Impact resistance    | IK08                                                                                                                                     |
| Corrosion resistance | 5CE                                                                                                                                      |

Electrical description

|                  |      |
|------------------|------|
| Driver / Ballast | DALI |
|------------------|------|

Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=40° L90B10 > 90000h |
|----------|------------------------|

**Control****1-10 V analogue dimming interface**

| Description                       | Part ID  | C  |
|-----------------------------------|----------|----|
| 1-10 V analogue dimming interface | 430-0011 | 90 |

---

**DALI interface**

| Description                | Part ID |
|----------------------------|---------|
| Low voltage DALI interface | 0026    |

**0-10 V, 24VDC low voltage version**

| Description                       | Part ID |
|-----------------------------------|---------|
| 24VDC low voltage version, 0-10 V | 0033    |

Optical Accessories

Surface wash lens

| Description       | Part ID  | C1 |
|-------------------|----------|----|
| Flood lens IO-360 | 145-9992 | 87 |



Linear spread lens

| Description               | Part ID  | C1 |
|---------------------------|----------|----|
| Linear spread lens IO-180 | 145-9991 | 87 |



FLC321 Wall bracket

Wallwash lens

| Description         | Part ID  | C1 |
|---------------------|----------|----|
| Wallwash lens IO-20 | 145-9993 | 87 |



Honeycomb louvre

| Description         | Part ID  | C1 |
|---------------------|----------|----|
| Honeycomb louvre IW | 145-9994 | 87 |



FLC321 Wall bracket

Glare shield

| Description     | Part ID  | A  | C1  |
|-----------------|----------|----|-----|
| Glare shield ES | 145-9995 | 55 | 114 |



Snoot

| Description | Part ID  | A  | C1  |
|-------------|----------|----|-----|
| Snoot ET    | 145-9996 | 56 | 114 |

