

## FLC301 Space frame

**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaires are factory-sealed and does not need to be opened during installation.



Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Including terminal box, for mounting on Ø 1.89-2.36 in pipes or space frames.

120V mains voltage version only, ON-OFF Class I.

Weight	1.70 lb
Light distribution	wallwash
Light source	LED-1/4W / 350 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	5 W
<b>Delivered lumens (lm)</b>	
LED Lumen	358.8
Total Lumen	358.8
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	530
Total Lumen	530
Tc	25

## FLC301 Space frame

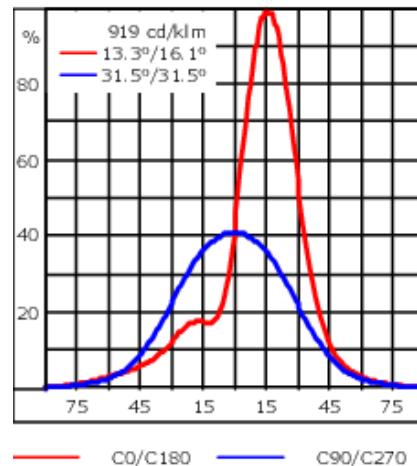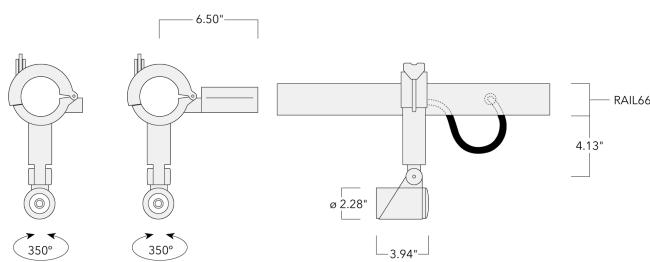

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 20px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 20px; height: 15px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 20px; height: 15px; background-color: #F0F0F0; margin-right: 10px;"></div> RAL9016 White
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.323 ft <sup>2</sup>

### Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

### Additional information


Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

## FLC301 Space frame

## Optical Accessories


## Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	145-7229	42.5



**FLC301 Space frame****Wallwash lens**


Description	Part ID	C1
Wallwash lens I0-20	145-7230	42.5



C1

**Honeycomb louvre**


Description	Part ID	C1
Honeycomb louvre IW	145-7231	42.5



C1

**FLC301 Space frame****Glare shield**

Description	Part ID	A	C1
Glare shield ES	145-7232	20.5	58

**Snoot**

Description	Part ID	A	C1
Snoot ET	145-7233	22.5	58

