



Description

IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral EC electronic converter. DALI. CAD-optimised OLC® One LED Concept optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.


Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

The optional brackets RM are required for mounting. To be ordered separately.

| | |
|--------------------|------------------------------|
| Weight | 7.50 kg |
| Light distribution | asymmetric, side throw [S70] |
| Light source | LED-18/18W / 350 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 18 |
| Rated input power | 21 W |

| | |
|--------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 170 |
| Total Lumen | 3060 |
| Tj | 85 |

| | |
|-------------------|------|
| Rated lumens (lm) | |
| LED Lumen | 151 |
| Total Lumen | 2718 |
| Ta | 25 |

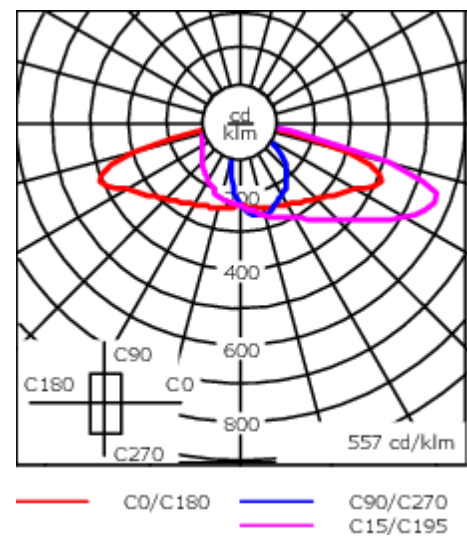

Specifications
Material description

| | |
|----------------------|--|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | RFC® Reflection Free Contour technology |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK08 |
| Corrosion resistance | 5CE |
| Windage | 0.046 m² |

Electrical description

| | |
|------------------|--|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter. DALI |
| Power factor | > 0.9 |
| Surge protection | 6/6 kV (optional SP10) |

105-9805
RMC320 LED



Additional information

| | |
|-------------------------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source) |

Control

Eco Step Dim® Basic

| Description | Part ID |
|-------------------------|----------|
| Eco Step Dim® Basic LED | 430-0001 |

Eco Step Dim® Advanced

| Description | Part ID |
|----------------------------|----------|
| Eco Step Dim® Advanced LED | 430-0002 |


R2C Ready to Connect

| Description | Part ID |
|----------------------------|----------|
| R2C Ready to Connect (top) | 430-0019 |


Mounting Accessories

Wall and pole brackets RM

| Description | Part ID | C1 | C2 | C3 | D1 | D × L1 | H1 | H2 | M1 | Weight (kg) |
|-----------------------------|----------|----|----|----|-----|---------|----|----|----|-------------|
| RM1-76 Pole bracket, single | 105-9847 | | | | 102 | 76 x 80 | | | | 1.00 |




| | | | | | | | | | | |
|---------------------------|----------|----|--|--|------|--|-----|-----|----|------|
| RM1-S Pole bracket, short | 105-9845 | 50 | | | ≥ 76 | | 150 | 124 | 11 | 0.60 |
|---------------------------|----------|----|--|--|------|--|-----|-----|----|------|

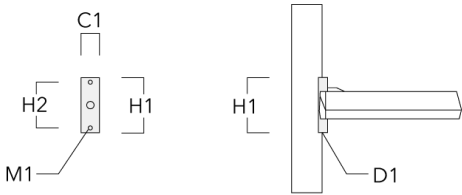


105-9805

RMC320 LED

| Description | Part ID | C1 | C2 | C3 | D1 | D × L1 | H1 | H2 | M1 | Weight (kg) |
|----------------------------|----------|-----|-----|----|----|--------|-----|-----|----|-------------|
| RM1-W Wall bracket, single | 105-9846 | 375 | 105 | 80 | | | 175 | 155 | 6 | 1.30 |

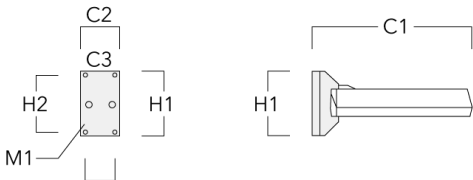

| | | | | | | | | | | |
|-----------------------------|----------|--|--|--|-----|---------|--|--|--|------|
| RM2-76 Pole bracket, double | 105-9848 | | | | 102 | 76 x 80 | | | | 1.00 |
|-----------------------------|----------|--|--|--|-----|---------|--|--|--|------|



Optical Accessories

Light shield

| Description | Part ID | Additional information |
|-------------|----------|---|
| LS180-[A60] | 430-0038 | Light shield LS180 to greatly reduce or eliminate light pollution. PA injection moulded component, black matt. Suitable for asymmetric light distribution [A60]. |
| LS180 | 430-0029 | Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering. |