



### Description

IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. CCG® Controlled Compression Gasket. Non-reflective flat safety glass cover, hinged. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Can be used as post top or side entry version. Specification at time of order is recommended.


Spigot Ø 76 x 100 mm. Spigot Ø 60 x 100 mm or 42 x 100 mm option available. Must be indicated during order placement.

Contact WE-EF direct or your local WE-EF sales representative for an individual solution designed to precisely meet your needs.

Photometric files (IES, LDT) for light distributions [S61] [S65] [S66] [S70] [R60] [R61] [P66] [Q66] [A61] with Back-light Shield on request.

Weight	4,70 kg
Light distribution	rectangular, side throw [R61]
Light source	LED-8/8W / 350 mA - 3000K
CRI	80
Power supply	EC
LEDs	8
Rated input power	9.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	155
Total Lumen	1240
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	118.7
Total Lumen	949.6
T <sub>a</sub>	25

## AFL110 LED

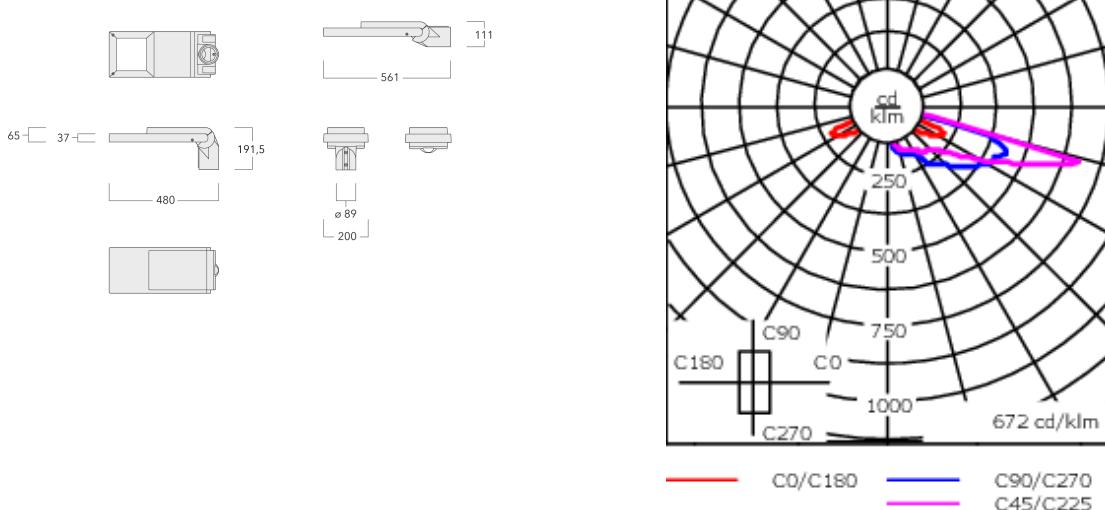

## Specifications

## Material description

Body Marine-grade, die-cast aluminium alloy

Lens Non-reflective safety glass lens

Colours
 

<span style="background-color: black; width: 15px; height: 10px;"></span>	RAL9004 Signal black
<span style="background-color: #c0c0c0; width: 15px; height: 10px;"></span>	RAL9006 White aluminium
<span style="background-color: #808080; width: 15px; height: 10px;"></span>	RAL9007 Grey aluminium
<span style="background-color: #333333; width: 15px; height: 10px;"></span>	RAL7016 Anthracite grey
<span style="background-color: #e0e0e0; width: 15px; height: 10px;"></span>	RAL9016 Traffic white

Gasket CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66

Impact resistance IK08

Corrosion resistance 5CE

Windage 0.092 m<sup>2</sup>

## Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter. DALI

Power factor > 0.9

Surge protection 6/6kV, optional 10kV

## Additional information

Lifetime Ta=25° L90B10 > 100000h

Energy efficiency class C-D (Light source)

## Control

### Eco Step Dim® Advanced

Description	Part ID
Eco Step Dim® Advanced LED	430-0002


### R2C Ready to Connect

Description	Part ID
R2C Ready to Connect (top)	430-0019
R2C Ready to Connect (below)	430-0027
R2C Ready to Connect (top and below)	430-0032

## Mounting Accessories


### Bird deterrent

Description	Part ID
Bird deterrent BD	430-0015

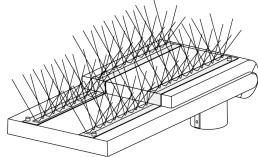


### Adaptor

Description	Part ID
Adaptor AFL100	102-0392




**Wall and pole brackets RE**

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight (kg)
RE2-540 Pole bracket, double	111-0043	200			76 x 130	550		5.30

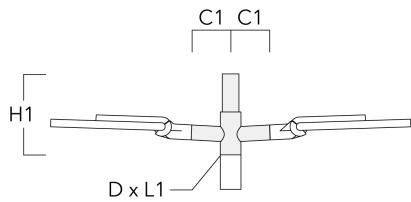


RE0-540 Wall bracket	111-0084	180	230	195	12	3.20
----------------------	----------	-----	-----	-----	----	------

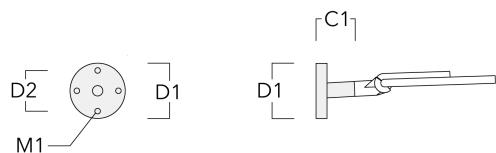


## AFL110 LED

Description	Part ID	C1	D1	D2	D × L1	H1	M1	Weight(kg)
RE1-540 Pole bracket, single	111-0042	200			76 x 130	500		4.60

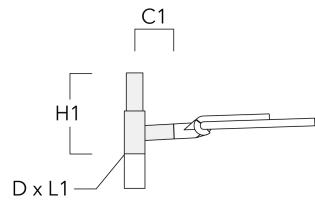


## Pole brackets RF

Description	Part ID	C1	D × L1	H1	Weight(kg)
RF2-540 Pole bracket, double	111-0047	200	76 x 80	200	3.30

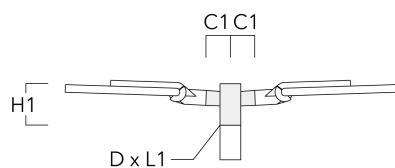


## AFL110 LED

Description	Part ID	C1	D × L1	H1	Weight(kg)
RF1-540 Pole bracket, single	111-0046	200	76 x 80	200	2.60

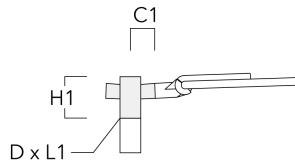


## Wall and pole brackets RX

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight(kg)
RX1-540 Pole bracket, single	111-0054	1000			76 x 130	550				6.8

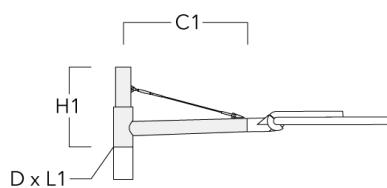


## AFL110 LED

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	M2	Weight (kg)
RX2-540 Pole bracket, double	111-0055	1000			76 x 130	550				9.70

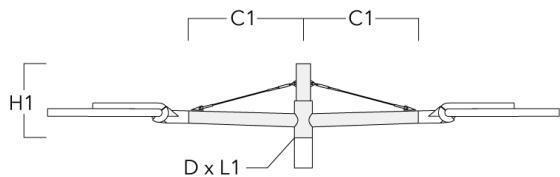

RX0-540 Wall bracket	111-0086	1000	140	100	450	385	30	12	5.20
----------------------	----------	------	-----	-----	-----	-----	----	----	------

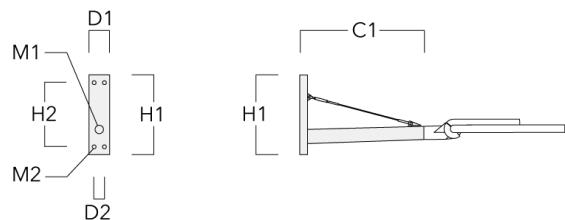

## Optical Accessories

### Backlight shield

Description	Part ID	Additional information
LS180	430-0029	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S61][S65][S66][S70][S71][R60][R61][P66][Q66][A61] lenses. Must be specified at time of ordering.

