

KTY234 LED II Security Bollard



Description

Impact-Rated Bollard. IP66. Class I. IK10. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate lens. CAD-optimized indirect optics for superior illumination and glare control. Integral driver in thermally separated compartment. Factory-installed LED circuit board.

Crash rated for small vehicles travelling up to 40mph (SC40), pick-up vehicles travelling up to 40mph (PU40), and medium-duty vehicles travelling up to 30mph (M30).

Luminaire spacing up to 35 ft; ideal for pathway lighting applications.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	19.80 lb
Light distribution	rectangular, side throw [R65]
Light source	LED-3/13W / 1400 mA - 4000 K
CRI	80
Power supply	PU40
LEDs	3
Rated input power	15.8 W


Nominal Lumen (lm)

LED Lumen	575
Total Lumen	1725
Tj	85

Delivered lumens (lm)

LED Lumen	231.6
Total Lumen	694.9
Ta	25

KTY234 LED II Security Bollard

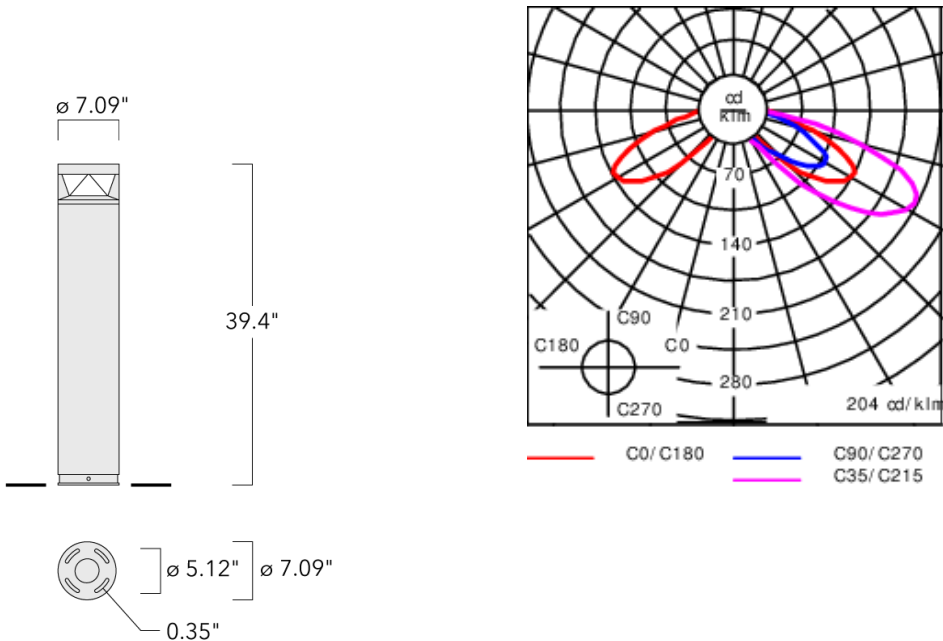

Specifications

Material description

Body	Marine-grade all-aluminum construction
Lens	Polycarbonate
Colors	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	Integral 10kV Surge Protector

KTY234 LED II Security Bollard

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Lead Time	This is a new product release and may have an extended lead time.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

KTY234 LED II Security Bollard

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.50



Optical Accessories

Light shield

Description	Part ID	H1	Weight (lb)
LS180 KTY (factory installed)	114-9185	2.59	0.04

