

## ZFY250 LED-FT II Security Bollard

**Description**

Impact-Rated Bollard. IP66. Class I. IK10. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. CAD-optimized indirect optics for superior illumination and glare control. Integral driver in thermally separated compartment. Factory-installed LED circuit board.


Crash rated for small vehicles travelling up to 40mph (SC40), pick-up vehicles travelling up to 40mph (PU40), and medium-duty vehicles travelling up to 30mph (M30).

Pre-wired post complete with cable connecting box and fuse for mains connection.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	lb
Light distribution	Blank Head [BLANK]
Light source	BLANK Head
CRI	NA
Power supply	M30 Shallow

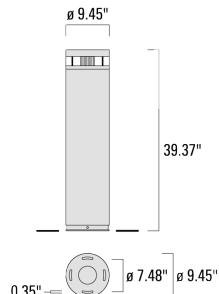**ZFY250 LED-FT II Security Bollard****Specifications****Material description**

Body	Marine-grade, all aluminum construction
Lens	Polycarbonate
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #808080; border-radius: 50%;"></span>  RAL9007 Grey Metallic       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: white; border-radius: 50%;"></span>  RAL9016 White       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: darkgray; border-radius: 50%;"></span>  RAL8019 Dark Bronze       </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

**Electrical description**

Driver / Ballast	Integral EC electronic converter
Surge protection	Integral 10kV Surge Protector

**Additional information**


Lifetime	Ta=25°/40° L70B50 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

## ZFY250 LED-FT II Security Bollard

## Mounting Accessories

## Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	M2	Weight(lb)
Planted root ESV4	300-0464	8.66	7.48	4.25	4.02	15.75	13.78	.35	.24	9.48

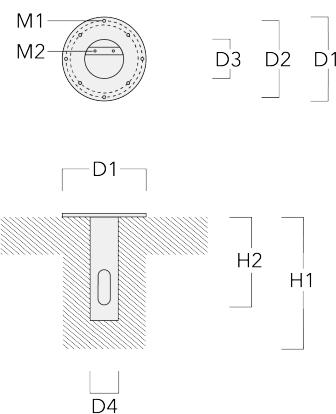

## ZFY250 LED-FT II Security Bollard

## Optical Accessories

## Light shield

Description	Part ID	H1	Weight (lb)
LS180 ZFY	117-0228	1.93	0.07

