




Description

RGBW/RGBA Colour Changer. IP66. Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral EC electronic converter in thermally separated compartment. DMX interface. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

| | |
|--------------------|----------------------|
| Weight | 13.30 kg |
| Light distribution | rectangular [R] |
| Light source | LED-36/95W - RGBW/3K |
| CRI | 20/80 |
| Power supply | ECG [DMX] |
| LEDs | 36 |
| Rated input power | 99 W |
| Nominal Lumen (lm) | |
| LED Lumen | 275 |
| Total Lumen | 9900 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 212.9 |
| Total Lumen | 7664.6 |
| Ta | 25 |

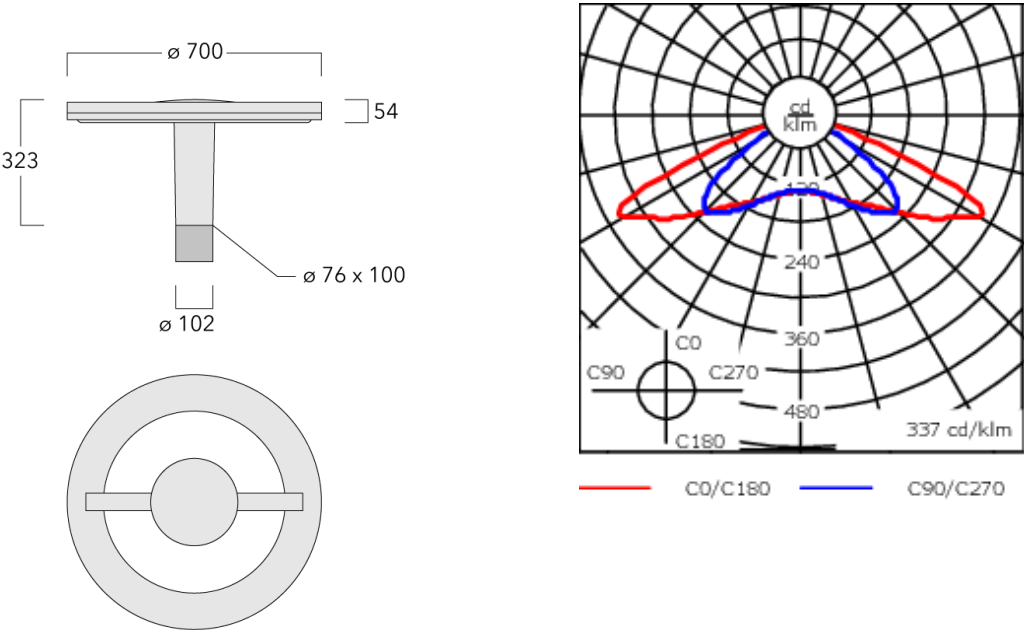

Additional information

| | |
|----------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
|----------|------------------------|

Control

DMX Wireless Antenna

| Description | Part ID |
|-----------------|----------|
| Antenna RF 5dB | 430-0036 |
| Antenna RF1.8dB | 430-0018 |