


#### **Description**

IP66, Class I. IK07. Surface mounted LED wall luminaire. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming on request. Suitable for installation over 4" recessed junction box. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

ADA (American Disabilities Act) Compliant.

Weight	4.20 lb
Light distribution	symmetric, medium beam up and down [M/M]
Light source	LED-2x3/12W / 700 mA - 3000K
CRI	80
Power supply	electronic gear
BUG	B1 U0 G0 Down Only
LEDs	6
Rated input power	15 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	1740
Tj	85
Delivered lumens (lm)	
LED Lumen	195.5
Total Lumen	1173.1
Та	25

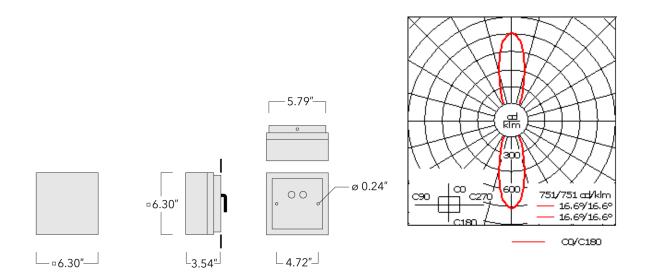

# Specifications Material description

Body Luminaire body and lens frame constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

### **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

#### 131-9409

we-ef

#### **QLS410 LED**

#### **Additional information**

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

131-9409

QLS410 LED



## **Mounting Accessories**

#### **Surface Collar**

Description	Part ID	А	В	C1	D1	D2	D3	M1	M2
QLS410 Surface Collar	131-6000	6.3	6.3	1.75	ø1	ø2	Ø0.38	5	5