





### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC\_R\_ One LED Concept. Two cable entries. Luminaire can be mounted for up or down lighting. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Weight	2.00 kg
Light distribution	symmetric, medium beam up and side throw down [M/S]
Light source	LED-2x3/12W / 700 mA - 4000K
CRI	80
Power supply	EC
LEDs	6
Rated input power	15 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	310
Total Lumen	1860
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	203.2
Total Lumen	1218.9
T <sub>a</sub>	25

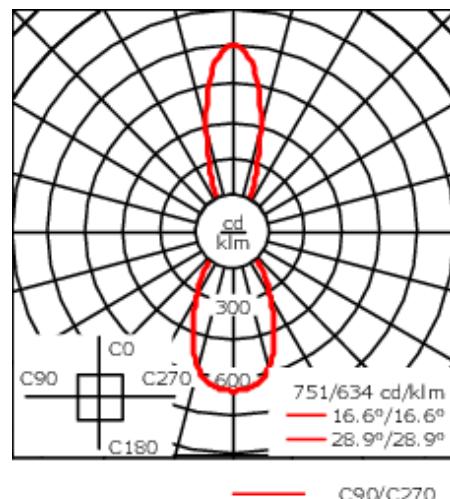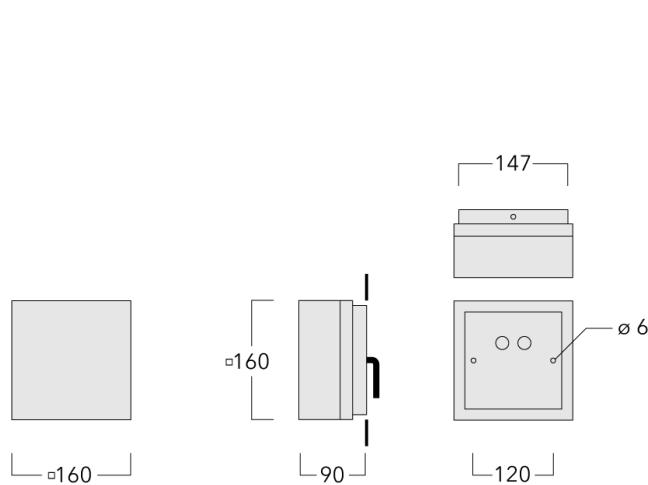

## Specifications

### Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: black; border-radius: 5px;"></span>  RAL9004 Signal black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #e0e0e0; border-radius: 5px;"></span>  RAL9006 White aluminium         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #808080; border-radius: 5px;"></span>  RAL9007 Grey aluminium         </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

### Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.