




### Description

IP65. Surface mounted wallwasher. Suitable for installation over 4" recessed junction box in uplight or downlight position. Optional 2200 K version available. To be specified at time of ordering.

|                              |  |
|------------------------------|--|
| Weight                       | 14.60 lb   |
| Light distribution           | symmetric, very narrow beam, 'sharp cut-off' [VNS] |
| Light source                 | LED-12/12W / 350 mA - 3000 K                       |
| CRI                          | 80   |
| Power supply                 | electronic gear                                    |
| BUG                          | B2 U0 G0   |
| LEDs                         | 12   |
| Rated input power            | 13.9 W   |
| <b>Nominal Lumen (lm)</b>    |  |
| LED Lumen                    | 155  |
| Total Lumen                  | 1860   |
| Tj                           | 85   |
| <b>Delivered lumens (lm)</b> |  |
| LED Lumen                    | 137.1  |
| Total Lumen                  | 1645.1   |
| Ta                           | 25   |

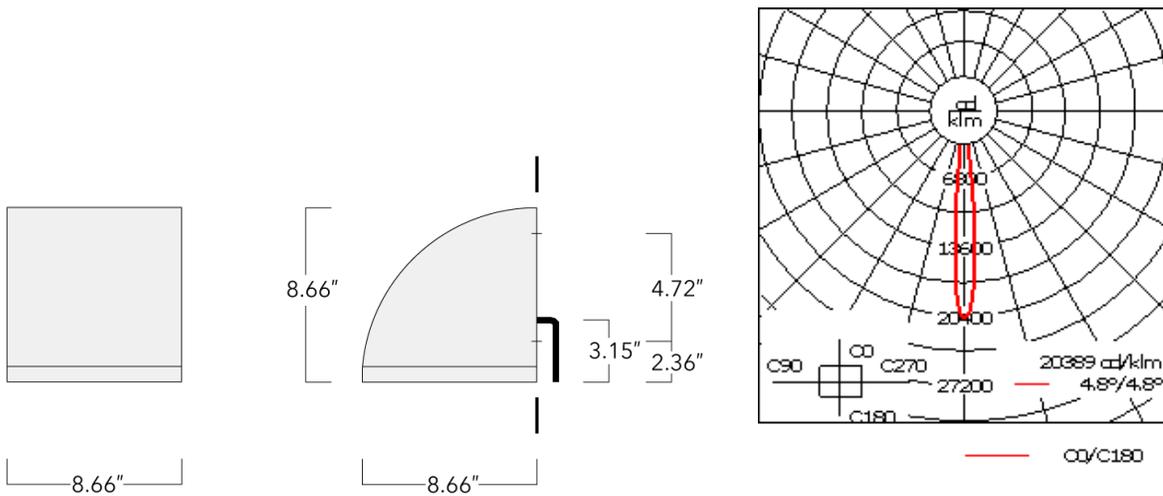

**Specifications**

**Material description**

|                      |  |
|----------------------|--|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.  |
| Lens                 | Tempered glass lens.   |
| Colors               | <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></span> RAL9004 Black</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: grey; margin-right: 5px;"></span> RAL9007 Grey Metallic</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: white; margin-right: 5px;"></span> RAL9016 White</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: darkgrey; margin-right: 5px;"></span> RAL8019 Dark Bronze</li> </ul> |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS polymer coated stainless steel   |
| Ingress protection   | IP65   |
| Impact resistance    | IK07   |
| Corrosion resistance | 5CE  |

**Electrical description**

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |

**Additional information**

---


|            |   |
|------------|---|
| Lifetime   | Ta=25°/40° L90B10 > 90000h  |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL listed. Suitable for wet locations.   |

---

**Mounting Accessories**

**Surface Collar**

| Description           | Part ID  | A    | B    | C1   | D1 | D2 | Weight (lb) |
|-----------------------|----------|------|------|------|----|----|-------------|
| OLV33_ Surface Collar | 132-6001 | 8.69 | 8.63 | 1.75 | ∅1 | ∅2 | 1.12        |

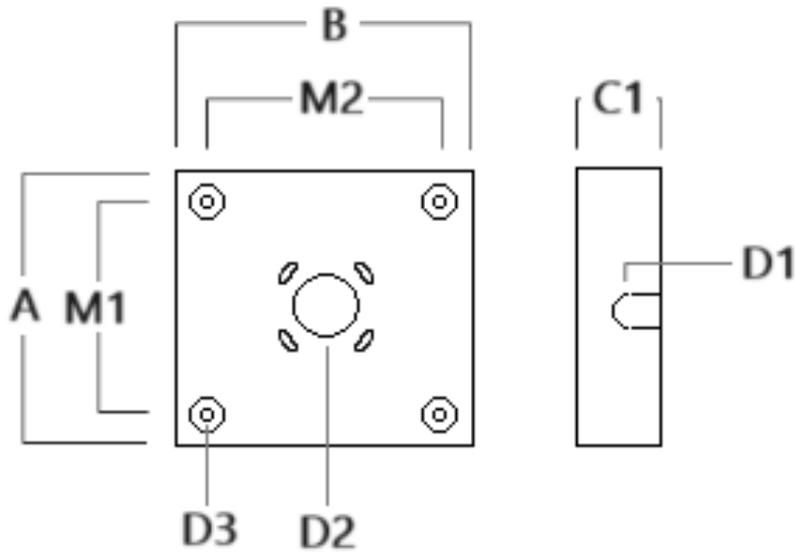

## Electrical Accessories

### Emergency Lighting Package

| Description                           | Part ID  | Additional information  |
|---------------------------------------|----------|---|
| OLV33_ LED Emergency Lighting Package | 132-6900 | Emergency battery backup operating for a minimum of 90 minutes, at full power, when main power is lost. |