



Description

IP65. IK08; IK10 on request with polycarbonate lens. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output.

Luminaire can be mounted for up or down lighting.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)


| | |
|--------------------|------------------------------|
| Weight | 14.60 lb |
| Light distribution | [R65] Type IV Medium |
| Light source | LED-12/12W / 350 mA - 3000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 12 |
| Rated input power | 13.9 W |

Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 155 |
| Total Lumen | 1860 |
| Tj | 85 |

Delivered lumens (lm)

| | |
|-------------|--------|
| LED Lumen | 116.2 |
| Total Lumen | 1394.4 |
| Ta | 25 |

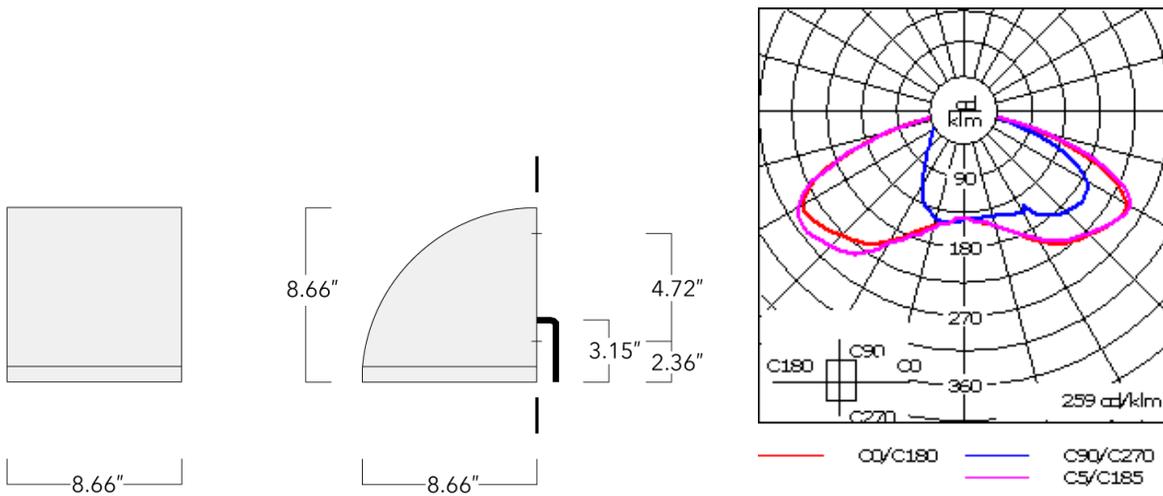

Specifications

Material description

| | |
|----------------------|---|
| Body | Luminaire body and lens frame constructed in die cast aluminum. |
| Lens | Tempered glass lens. |
| Colors | <div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL9004 Black </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: grey; margin-right: 5px;"></div> RAL9007 Grey Metallic </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: white; margin-right: 5px;"></div> RAL9016 White </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: darkgrey; margin-right: 5px;"></div> RAL8019 Dark Bronze </div> </div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP65 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |

132-0528

we-ef

OLV334 LED

Additional information

| | |
|----------|---|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL listed. Suitable for wet locations. |


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 03/05/2026

Mounting Accessories

Surface Collar

| Description | Part ID | A | B | C1 | D1 | D2 | Weight (lb) |
|----------------------|----------|------|------|------|----|----|-------------|
| OLV33_Surface Collar | 132-6001 | 8.69 | 8.63 | 1.75 | ∅1 | ∅2 | 1.12 |

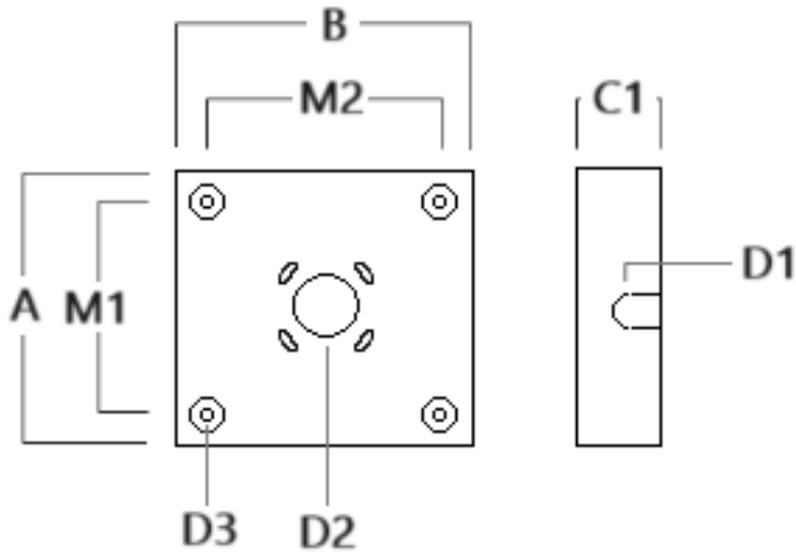

132-0528

we-ef

OLV334 LED

Electrical Accessories

Emergency Lighting Package

| Description | Part ID | Additional information |
|---------------------------------------|----------|---|
| OLV33_ LED Emergency Lighting Package | 132-6900 | Emergency battery backup operating for a minimum of 90 minutes, at full power, when main power is lost. |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/05/2026