



Weight

Description


IP65, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request. Optional 2200 K version available. To be specified at time of ordering.


Can be mounted up or down.

| Light distribution | asymmetric, side throw [S70] |
|--------------------|------------------------------|
| Light source | LED-24/24W / 350 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 24 |
| Rated input power | 26.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 170 |
| Total Lumen | 4080 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 141.6 |
| Total Lumen | 3398.3 |
| Та | 25 |

11.40 kg



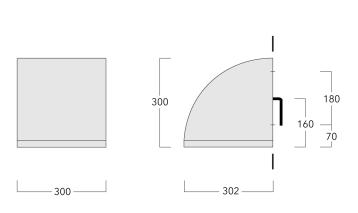

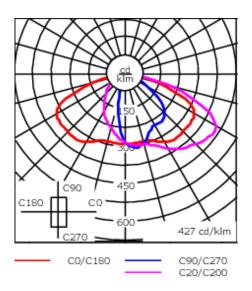

Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP65
Impact resistance IK07

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime $Ta=40^{\circ} L90B10 > 90000h$

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement

located on www.we-ef.com for further details.





Control

1-10 V analogue dimming interface

| iption Part II | t ID C |
|------------------------------------|----------|
| V analogue dimming interface 430-0 |)-0011 9 |

132-0547





DALI interface

| Description | Part ID | Additional information | С |
|--------------------|----------|---|----|
| DALI interface 430 | 430-0013 | DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). | 90 |
| | | Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear | |
| | | Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed! | 9 |