

### **Description**

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming on request.

Can be mounted up or down.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	25.10 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-24/36W / 500 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	24
Rated input power	39 W
Nominal Lumen (lm)	
LED Lumen	230
Total Lumen	5520
Tj	85
Delivered lumens (lm)	
LED Lumen	199.8
Total Lumen	4796
Та	25

we-ef

## **OLV340 LED**

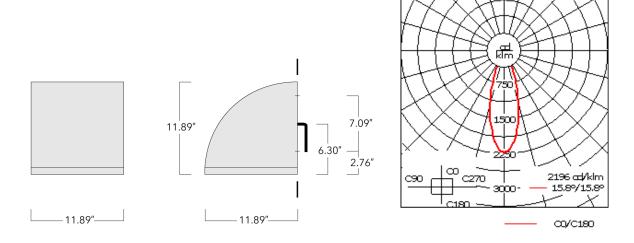

# **Specifications**

## **Material description**

Body Luminaire body and lens frame constructed in die cast aluminum.

Lens Tempered glass lens.

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP65
Impact resistance IK07
Corrosion resistance 5CE

## **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

### **Additional information**

Lifetime  $Ta=25^{\circ}/40^{\circ} L90B10 > 90000h$ Listings ETL listed. Suitable for wet locations.

#### **WE-EF LIGHTING USA, LLC**

132-0553

**OLV340 LED** 



# **Electrical Accessories**

# **Emergency Lighting Package**

Description	Part ID	Additional information
OLV34_ LED Emergency Lighting Package	132-6901	Emergency battery backup operating for a minimum of 90 minutes, at full power, when main power is lost.