



### Description

Vertically oriented, diffused steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)


|                    |                            |
|--------------------|----------------------------|
| Weight             | 2.40 lb                    |
| Light distribution | diffused distribution      |
| Light source       | LED-6/6W / 350 mA - 3000 K |
| CRI                | 80                         |
| Power supply       | electronic gear            |
| LEDs               | 6                          |
| Rated input power  | 7.5 W                      |

### Nominal Lumen (lm)

|             |     |
|-------------|-----|
| LED Lumen   | 155 |
| Total Lumen | 930 |
| Tj          | 85  |

### Delivered lumens (lm)

|             |       |
|-------------|-------|
| LED Lumen   | 36.6  |
| Total Lumen | 219.3 |
| Ta          | 25    |

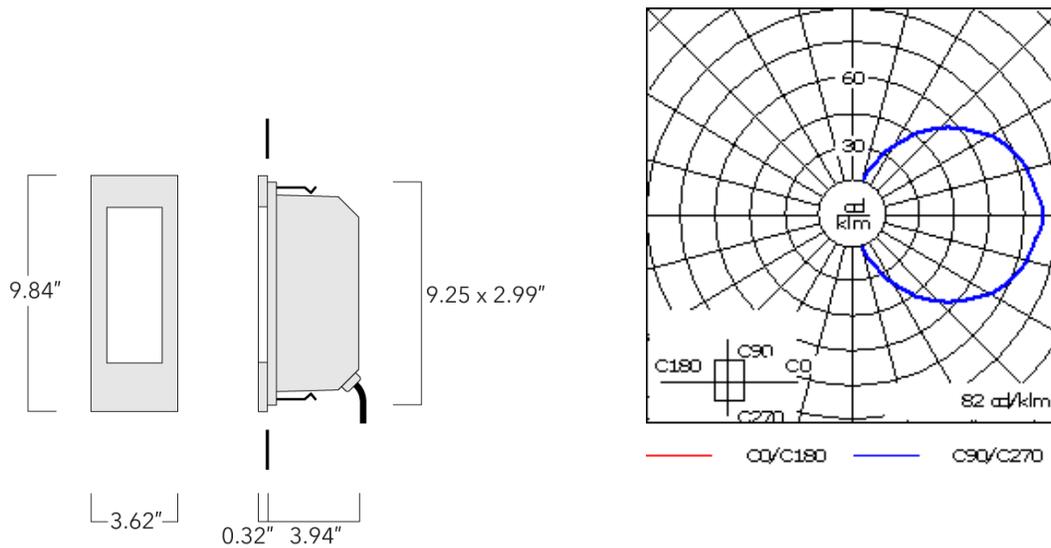

## Specifications

### Material description

|                      |  |
|----------------------|--|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.  |
| Lens                 | Opal polycarbonate lens.   |
| Colors               | <ul style="list-style-type: none"> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></span> RAL9004 Black</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: grey; margin-right: 5px;"></span> RAL9007 Grey Metallic</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: white; margin-right: 5px;"></span> RAL9016 White</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: darkgrey; margin-right: 5px;"></span> RAL8019 Dark Bronze</li> </ul> |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS polymer coated stainless steel   |
| Ingress protection   | IP55   |
| Impact resistance    | IK10   |
| Corrosion resistance | 5CE  |

### Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |

**133-0323**

**we-ef**

**SVO259 LED**

---

**Additional information**

---

|          |   |
|----------|---|
| Lifetime | Ta=25°/40° L80B10 > 54000h              |
| Listings | ETL listed. Suitable for wet locations. |

---

---

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 03/05/2026

## Mounting Accessories

### Installation blackout

| Description                   | Part ID  | A      | B     | C1    |
|-------------------------------|----------|--------|-------|-------|
| Installation blackout BST25-I | 133-0076 | 10.51" | 5.19" | 5.12" |

