



#### **Description**

Louvred Steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)


+ XXX-XXXX (Accessory 1)

| Weight                | 2.20 lb                    |  |  |  |  |
|-----------------------|----------------------------|--|--|--|--|
| Light distribution    | diffused distribution      |  |  |  |  |
| Light source          | LED-4/4W / 350 mA - 3000 K |  |  |  |  |
| CRI                   | 80                         |  |  |  |  |
| Power supply          | electronic gear            |  |  |  |  |
| LEDs                  | 4                          |  |  |  |  |
| Rated input power     | 5.5 W                      |  |  |  |  |
| Nominal Lumen (lm)    |                            |  |  |  |  |
| LED Lumen             | 155                        |  |  |  |  |
| Total Lumen           | 620                        |  |  |  |  |
| Tj                    | 85                         |  |  |  |  |
| Delivered lumens (lm) |                            |  |  |  |  |
| LED Lumen             | 4.3                        |  |  |  |  |
| Total Lumen           | 17.1                       |  |  |  |  |
| Та                    | 25                         |  |  |  |  |
|                       |                            |  |  |  |  |

#### STL209 LED



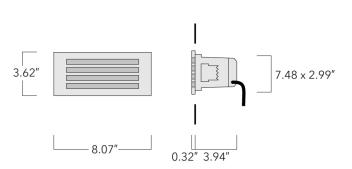



# **Specifications**

### **Material description**

Body Luminaire body and lens frame constructed in die cast aluminum.

Lens Opal polycarbonate lens.

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP55
Impact resistance IK10
Corrosion resistance 5CE

### **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

#### **WE-EF LIGHTING USA, LLC**

### 133-0324

## STL209 LED



### **Additional information**

| Lifetime | Ta=25°/40° L80B10 > 54000h              |
|----------|---|
| Listings | ETL listed. Suitable for wet locations. |

STL209 LED



# **Mounting Accessories**

## Installation blockout

| Description                   | Part ID  | Α     | В     | C1    | C   |
|-------------------------------|----------|-------|-------|-------|-----|
| Installation blockout BST20-I | 133-0075 | 8.74" | 4.29" | 4.13" | 105 |

