


## STO209 LED Stainless steel

**Description**

Low-glare, diffused steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

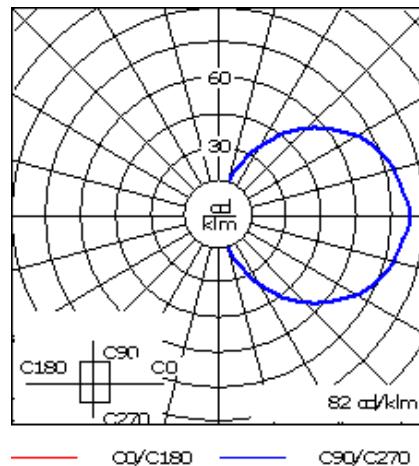
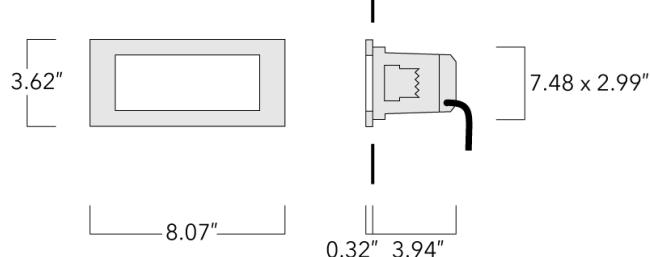
Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	2.00 lb
Light distribution	diffused distribution
Light source	LED-4/6W / 500 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	4
Rated input power	8 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	215
Total Lumen	860
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	50.7
Total Lumen	202.8
T <sub>a</sub>	25

## STO209 LED Stainless steel

**Specifications****Material description**

Body	Luminaire body constructed in die cast aluminum.
Lens	Opal polycarbonate lens.
Colors	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

**Additional information**

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

## STO209 LED Stainless steel

## Mounting Accessories

## Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST20-I	133-0075	8.74"	4.29"	4.13"	105

