STG209 LED





Description

Grated Steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware.

Powdercoat Finish. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)


+ XXX-XXXX (Accessory 1)

Weight	2.20 lb				
Light distribution	diffused distribution				
Light source	LED-4/4W / 350 mA - 4000 K				
CRI	80				
Power supply	electronic gear				
LEDs	4				
Rated input power	5.5 W				
Nominal Lumen (lm)					
LED Lumen	170				
Total Lumen	680				
Tj	85				
Delivered lumens (lm)					
LED Lumen	20.6				
Total Lumen	82.4				
Та	25				
·					

STG209 LED



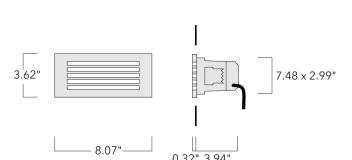



Specifications

Material description

Body Luminaire body and lens frame constructed in die cast aluminum.

Lens Opal polycarbonate lens.

Colors

RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP55
Impact resistance IK10
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter

WE-EF LIGHTING USA, LLC

133-0332

STG209 LED



Additional information

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

133-0332

STG209 LED



Mounting Accessories

Installation blockout

Description	Part ID	Α	В	C1	C
Installation blockout BST20-I	133-0075	8.74"	4.29"	4.13"	105

