


## STX209 LED

**Description**

Recessed Wall Luminaire.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. 0-10V Dimming standard.



A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	2.20 lb
Light distribution	diffused distribution
Light source	LED-4/4W / 350 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	4
Rated input power	5.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	155
Total Lumen	620
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	18.8
Total Lumen	75.1
T <sub>a</sub>	25

## STX209 LED

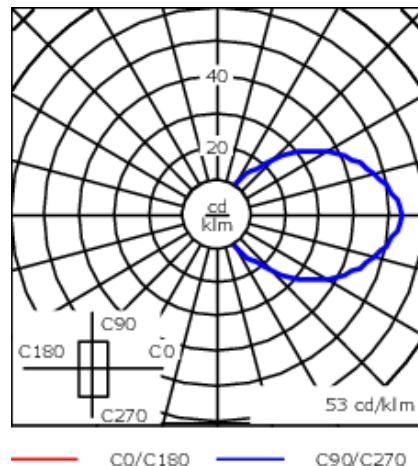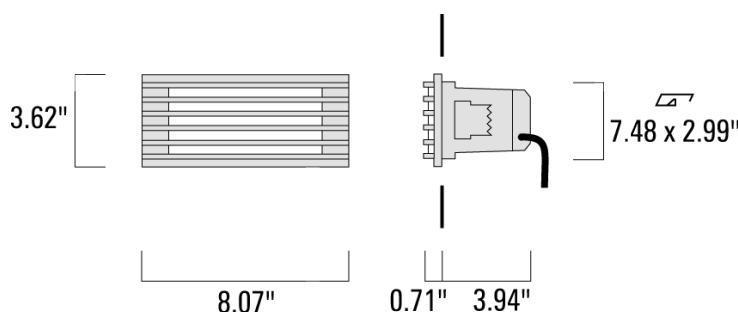

## Specifications

## Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Opal polycarbonate lens.
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: #808080; border-radius: 50%;"></span>  RAL9007 Grey Metallic       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: #F0F0F0; border-radius: 50%;"></span>  RAL9016 White       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 15px; height: 15px; background-color: #555555; border-radius: 50%;"></span>  RAL8019 Dark Bronze       </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

## Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

**Additional information**

---

Lifetime LED >60,000 h Ta 25°(B10/70)

Control gear >50,000 h Ta 25°

Listings ETL listed. Suitable for wet locations.

---