

## STP204 LED

**Description**

Low glare steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

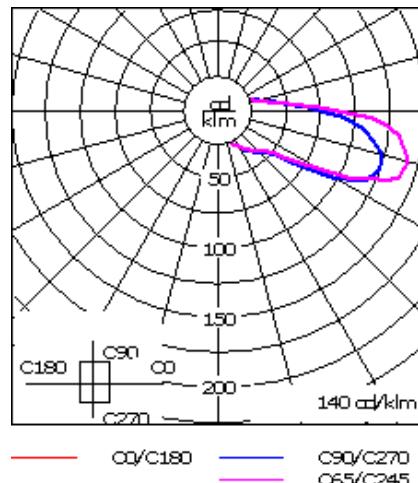
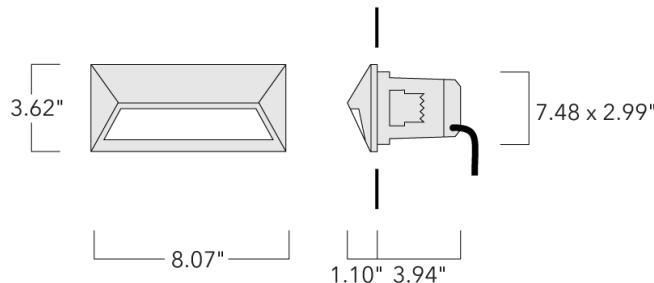
Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	2.00 lb
Light distribution	asymmetric, forward-throw [A60]
Light source	LED-4/4W / 350 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	4
Rated input power	5.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	155
Total Lumen	620
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	35.2
Total Lumen	141
T <sub>a</sub>	25

## STP204 LED

**Specifications****Material description**

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Prismatic polycarbonate lens.
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #808080; border-radius: 50%;"></span>  RAL9007 Grey Metallic         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #F0F0F0; border-radius: 50%;"></span>  RAL9016 White         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #555555; border-radius: 50%;"></span>  RAL8019 Dark Bronze         </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

## Additional information

---

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

## Mounting Accessories

### Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST20-I	133-0075	8.74"	4.29"	4.13"	105

